## For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

# VF1-\*\*DL & VF3-\*\*DL Speedi Plumb® Vinyl Toilet Connectors - Flare Inlet

*Use:* For use in potable water distribution systems in accessible locations only

#### **Design Features:**

- No kink hose. The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- Strong & durable with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- Longer wing nuts ease installation for speedier connections
- Rubber washers provide a large pliable sealing surface and ensures a long lasting water tight connection
- 8-sided pneumatic crimp provides greater dependability for reliable nut-to-hose connections



### **Operating Specifications:**

**Temperature:** 40°- 160° F, intermittent to 180° F

**Pressure:** 125 PSI maximum


**Tubing Diameter:** 0.300" ID (0.500" OD)

20.	CHINED AND	
0,	***	1SSI
SIGNE	***	MB/
H		8
•	W THE USA	


CONNECTOR MATERIAL SPECIFICATIONS		
Hose	PVC with polyester braid reinforcement	
Barbs	Brass	
Ferrules	Steel, zinc plated	
Ballcock Nut	Polypropylene	
Inlet Nut	Brass, plated	
Washers	Rubber	

#### Part Listing:

VF1-12DL F	3/8" flare x 7/8" ballcock x 12" length
VF1-20DL F	3/8" flare x 7/8" ballcock x 20" length
VF3-12DL F	1/2" flare x 7/8" ballcock x 12" length



# VF1-\*\*DL & VF3-\*\*DL Speedi Plumb® Vinyl Toilet Connectors - Flare Inlet

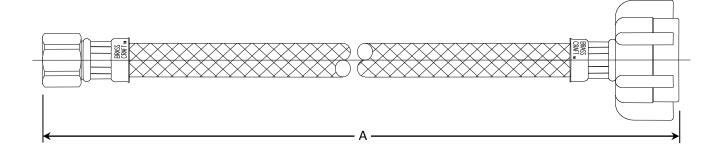

PART DIMENSIONS (Inches)		
Model	Dim. A	
VF1-12DL	12.00 / 13.00	
VF1-20DL	20.00 / 21.00	
VF3-12DL	12.00 / 13.00	

### **Listings & Certifications:**

 IAPMO listed to ASME A112.18.6 and CSA B125.6 (includes NSF/ANSI372 and NSF61)





