

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	40
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

BNOBRF00T-XX

BNOBRF00N-XX

Freestanding

TUB Soaker	\$
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control (not installed)	Included with therapy

FEATURES				
Installation type		Freestanding		
No. of bathers	•	Imp. gallons		38
US gallons	45			
INTEGRATED WASTE & OVERFLOW BOVERINI-XX				
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10		Installed & Included		
STANDARD COLOR				
White 01				Included

OPTIONS (UPCHARGE APPLICABLE)		
FINISH		
UltraVelour Matte Finish (White only) BVEL	\$	
INTEGRATED WASTE & OVERFLOW BOVERINI-XX		
Matte Black 19, Black Chrome 12, Satin Brass 18	\$	
CONTROL* (TMU only)		
MiaMulti® BMIAM2-XX	\$	
AIR INTAKE** & ISLAND TUB DRAIN™***		
Air intake & Island Tub Drain™ BAIRISLD	\$	
Island Tub Drain™ BISLDD	\$	
Cast Iron Island Tub Drain™ BISLDDCI	\$	
Air intake BAIRINT	\$	
Air intake installation	\$ net	
TILE FLANGE (specify position)		
Ordered with bath (not installed) BTILEN	\$	
Factory-installed. Right BTILER, Left BTILEL, Front BTILEF, Back BTILEB, Special installation BTILEO	\$	
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD		
Brass waste & overflow kit BDRCOB	\$	
Brass waste kit BDRCB	\$	

Don't forget that this bath is available in **White only**. If turbine is installed under the bath, please follow the installation instructions specified in the **Nokori Installation Manual**.

* For TMU, control must be wall-mounted. Faucets must be freestanding


- or wall-mounted.
- ** Air Intake and access to electronics are required.
- *** An Island Tub Drain™ is required when there is no access under the bath.

TOTAL PRICE







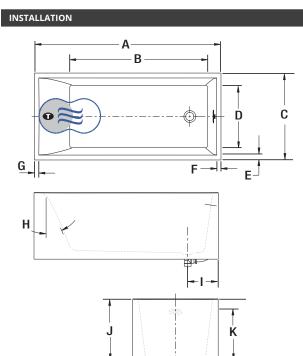

LETTER	DESCRIPTION	MEASURE
Α	Total length	58"
В	Bathing well length	43 1/4"
С	Total width	27"
D	Bathing well width	19 5/8"
E	Deck width	1 3/4"
F	Deck width at waste end	1 3/4"
G	Deck width at backrest	1 1/2"
Н	Slope of backrest	24°
ı	Outside edge to center of waste	9 3/4"
J	Height from waste to top of deck	19"
K	Maximum water level	14 7/8"
L	Total height	23"

- Turbine position (TMU)
- Indicates heated backrest (TMU)

TECHNICAL SP	ECIFICATIONS			
Hot water supply required	Should be 70% of water capacity of TUB or greater.	Approx. shipping weight	225 lbs	
supply required		Turbine power	550 W	
Turbine 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (coption, a second line is needed 15 A. 120 V, 60 hz, dedicate	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional	Air heater	600 W	
	option, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI.	WARRANTY		
	Air vent necessary: 8 sq. in. minimum.	Controls-LED-Geysair*	5 years	
	- Faucet must be freestanding or wall-mounted Controls cannot be installed on the bath.	Bath & turbine*	20 years	
	- The turbine should be remotely installed The turbine can also be installed under the bath. Please refer to the Nokori Installation Instructions.	* Some restrictions apply www.bainultra.com/warranty		
	st be installed by certified professionals only and according to our Owner's Manual as well as federal, and local building codes and regulations (www.bainultra.com/documentation/documentation).			





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.