

## thalassa2 6633

66" x 33" x 20"



## Product No.

Model TMU BTHJRBOOT-XX Soaker BTHJRBOON-XX

## ThermoMasseur (TMU)

Air Jet System **\$4,995**

Jets	40
1 heated backrest	Included
Mia® Control	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995

## Soaker

**\$2,495**

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy

## Features

Installation Type	Drop-in & Alcove (3 walls)
No. of bathers	Imp. gallons 41 US gallons 50 Armrests 2
Standard Bath Color	p.17
<input type="checkbox"/> White 01	Included

## Options UPCHARGE APPLICABLE

## Control (TMU only) p.13

MiaPlus®# BMIAP1-XX \$285

Grab Bars p.16 \$125

Skirt p.254 Multifit BSMUL-XX SJ-1 BSJ-XX

 White 01 \$695 \$715

Tile Flange p.15

Ordered with bath (not installed) BTILEN \$79

Factory-installed. Front BTILEF. Special installation BTILEO \$155

Bath Pillow BPILLOW p.252 \$240

Drain &amp; Overflow p.14 Integrated ZenFlow® BOVERINZF-XX 16" x 35" BOVER16-XX

 Chrome 07 \$205 \$260 White 01 \$165 \$290 Brushed Nickel 09 \$205 \$290 Polished Nickel 10 \$205 \$290 Oil-rubbed Bronze 11 N/A \$400 Matte Black 19  Satin Brass 18 \$260 N/A

## If Required by Construction Code

Brass drain &amp; overflow kit BDRCOB \$240

Brass drain kit BDRCB \$60

16" x 35" Cable driven brass drain &amp; overflow kit BOVERBR \$240


† ZenFlow: Integrated overflow without a trim.

\*\* The AromaCloud® is built into the deck (factory installed).


# The MiaPlus® Control is Included when purchasing Chromatherapy on a TMU.

# thalassa2 6633

66" x 33" x 20"

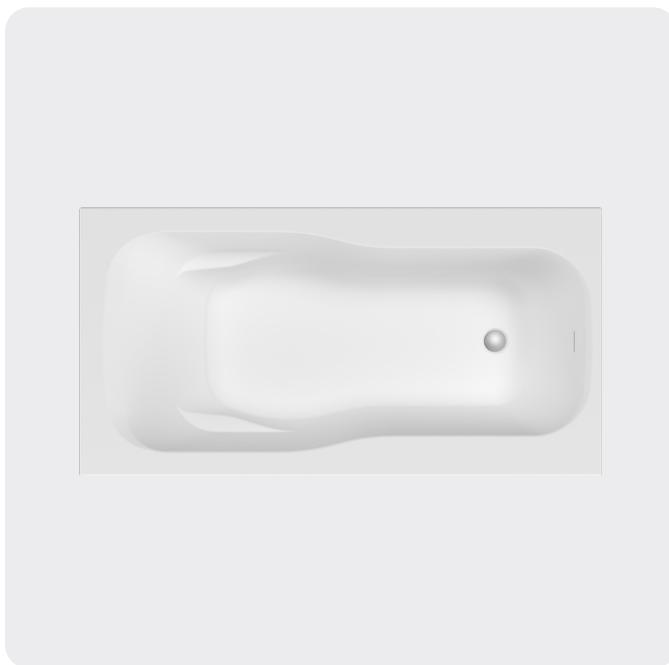

## Technical Specifications

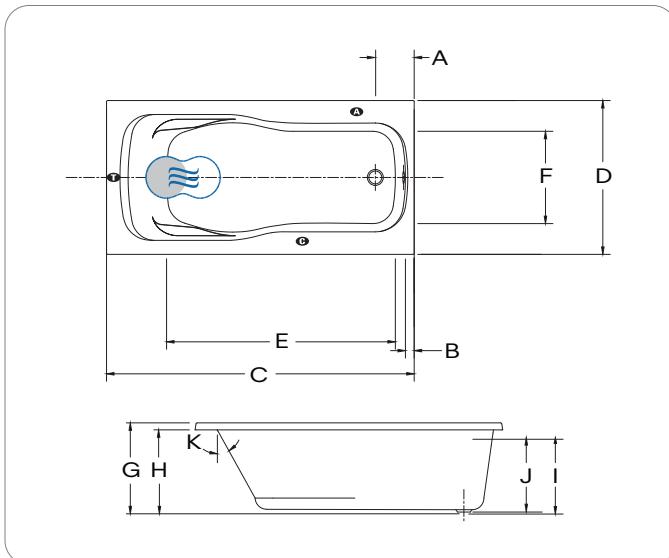

Letter	Description	Measure
A	Outside edge to center drain	8"
B	Outside edge to overflow	2 1/4"
C	Total length	65 3/4"
D	Total width	33"
E	Bathing well length	49"
F	Bathing well width	23"
G	Height from bottom of bath to top deck	19 1/2"
H	Height from bottom of bath to bottom of deck	18"
I	Height from bottom of drain to center of overflow	15 3/4"
J	Maximum water level (Drain & overflow 16" x 35")	13 3/4"
K	Slope of backrest	29°

A AromaCloud® position   C Control position when factory-installed (Mia® or DOT)  
 T Turbine position (TMU)   H Indicates heated backrest (TMU)  
 S Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
Optional Tile Flange (specify right or left).	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Approx. shipping weight	126 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance:  $\pm 0.25"$  ( $\pm 0.64$  cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.