



2902-2800, 2902-2873, 2902-2874, 2902-2878

Adjustable Motor, Adjustable Sensor-Operated Warm Air Hand Dryer

- Recommended for very high traffic areas.
- Standard Model 2902-280000 (cast iron white porcelain) **Bradex**[®]
- Standard Model 2902-287300 (steel-white epoxy) **Bradex**[®]
- Standard Model 2902-287400 (stainless steel-satin finish) **Bradex**[®]
- Standard Model 2902-287800 (stainless steel-bright polished finish)



Product Materials

- 2902-2800 COVER:** 3/16" (4.5 mm) thick one-piece cast iron; white porcelain enamel coating.
- 2902-2873 COVER:** 1/16" (1.5mm) thick one-piece steel; white epoxy finish.
- 2902-2874 COVER:** 1/16" (1.5mm) thick one-piece stainless steel; satin finish.
- 2902-2878 COVER:** 1/16" (1.5mm) thick one-piece stainless steel; bright polished finish.

Cover fixed to the base plate with two vandal-proof lock screws and lock with special key wrench.

ADJUSTABLE MOTOR: universal-type with high-speed, universal brush, fully adjustable (3,800–8,200 RPM) potentiometer, Class A; Aluminium centrifugal double asymmetrical inlet fan wheel; aluminum scroll fan and safety thermal cut-off.

HEATING ELEMENT: waved wire NiCr heating element mounted on a mica frame that incorporates a self-resetting thermal cut-off at 302°F.

ADJUSTABLE SENSOR OPERATION: electronic infrared detection sensor with fully adjustable (2"–8") potentiometer. Includes polycarbonate viewing windows. Automatic shut-off after 60 seconds.

BASE PLATE: 1/8" (3 mm) thick aluminum, with four Ø 5/16" (8 mm) holes for wall mounting. Includes silent blocking to dampen mechanical vibrations.

Installation

Verify all rough-in dimensions prior to installation. Hand dryers require a dedicated circuit and must be properly grounded. GFI Circuit protection is recommended. One side of dryer should be mounted to a stud.

Operation

Place hands 3"–6" below nozzle to activate air flow. Dryer will stop two seconds after hands are removed from air flow.

ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **Bradex**[®] will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Guide Specification

Surface-mounted ADA-compliant hand dryer shall have a thick cast iron cover with white porcelain enamel coating (2902-2800), steel cover with white epoxy coating (2902-2873), stainless steel cover with satin finish (2902-2874) or stainless cover with bright polished finish (2902-2878). Hand dryer shall include aluminium base plate, fully adjustable (2"–8") infrared sensor potentiometer and fully adjustable (3800 - 8200 RPM) universal-type motor potentiometer with resilient mounts and sealed, lubricated ball bearings. Dryer shall operate at 64–70 dB while delivering 43–70 CFM of air at 106°F–111°F (41°C–44°C) and 4,920–9,840 LFM velocity during user-controlled drying cycle. Dryer shall have a total power of 800–1,150 W (1.07–1.54 Hp) with a consumption of 9.5–4.8 A.

Overall dimensions: 10½"H x 11½"W x 4"D (267mm x 292mm x 102mm).

Weight: 7.9 lb (3.58 kg)

Product Specifications


Voltage:	100–120 V, 208 V, 220–240 V	Consumption:	9.5–4.8 A
Motor:	1/2 HP (250 W)	RPM:	3,800–8,200
Nominal power:	1,150 W (1.54 Hp)	Heating element:	900 W (1.20 Hp)
Effective airflow:	36–58 CFM	Nominal airflow:	43–70 CFM
Noise level at 79":	64–70 dB	Airspeed:	4,920–9,840 LFM
Frequency:	50/60 Hz	Insulation:	Grounding required
Temperature (at 4" distance / 70°F):	106°F–111°F (41°C–44°C)	Certificates:	UL 499 / CSA C22.2 / VDE GS / VDE EMC
Drying time:	12–15 seconds	Mounting:	Surface. ADA-compliant
Protection level:	IP23 Splash Protection		



2902-2800, 2902-2873, 2902-2874, 2902-2878

Adjustable Motor, Adjustable Sensor-Operated Warm Air Hand Dryer

Dimensions

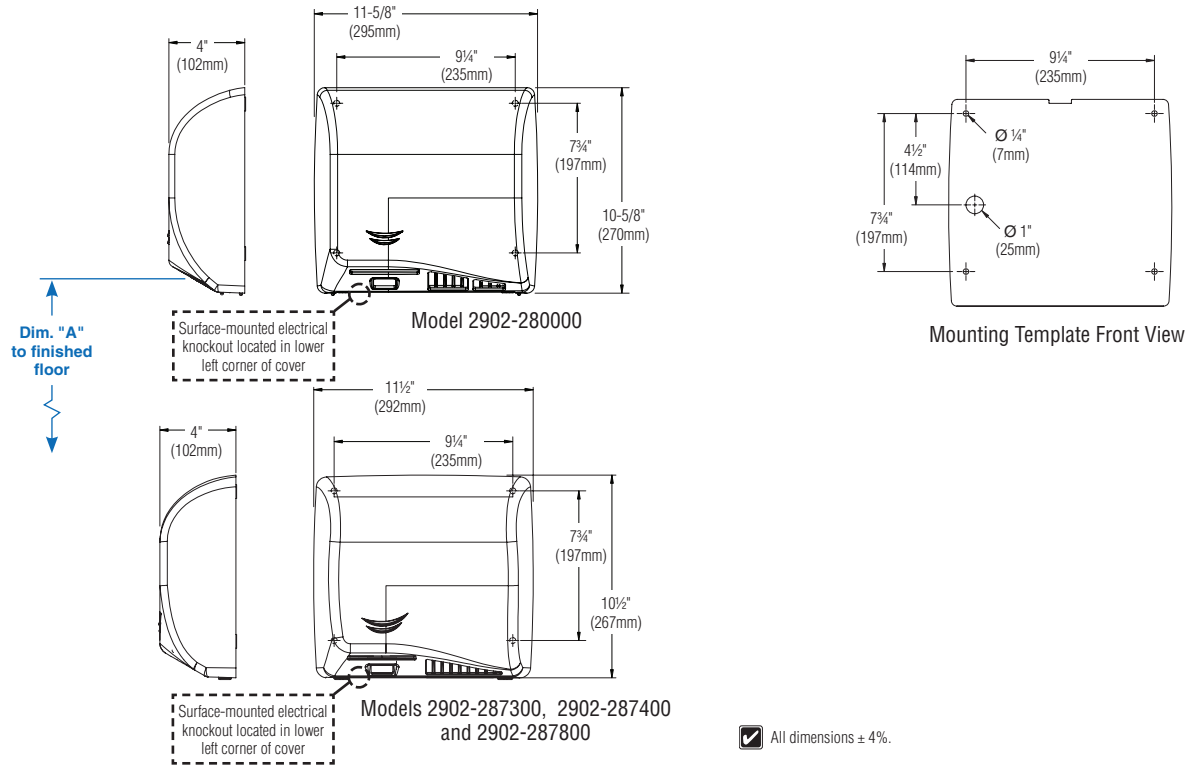

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Sensor top to finished floor	48" (1219mm)	57 ³ / ₄ " (1467mm)	47 ¹ / ₈ " (1197mm)
	45" (1143mm)	54 ³ / ₄ " (1391mm)	44 ¹ / ₈ " (1121mm)
	42" (1067mm)	51 ³ / ₄ " (1314mm)	41 ¹ / ₈ " (1045mm)
	40" (1016mm)	49 ³ / ₄ " (1264mm)	39 ¹ / ₈ " (994mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2
 9/20/2017
 This information is subject to change without notice.
 Bradley_HandDryer_2902-2800_2873_2874

© 2017 Bradley
 P.O. Box 309, Menomonee Falls, WI 53052-0309
 800 BRADLEY (800 272 3539) +1 262 251 6000
 bradleycorp.com