



# S19-110BF, S19-110BFSS Freestanding Drench Shower

- Exceeds American National Standard Z358.1 Specifications
- Exceeds Australia/New Zealand AS4775 & AS/NZS 4020
- Galvanized Steel Protected with BradTect® Safety Yellow Coating or All Stainless Steel (S19-110BFSS)
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- Certified by IAPMO OCEANA to AS4775 and AS/NZS 4020



## Specifications


Designed for locations where wall-mounted showers are impractical. Shower provides a superior washdown with a more even spray pattern when the operating handle is pulled.

*This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.*

## Standard Equipment

### SpinTec™ Showerhead

Standard showerhead is 3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic. High performance corrosion-resistant stainless steel showerhead measures 1½" (38mm) in diameter (S19-110BFSS). SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

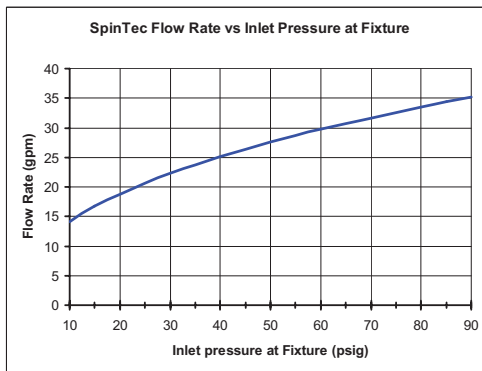

### Valve


Chrome-plated brass 1" NPT stay-open ball valve, operated by stainless steel pull rod with triangular handle. Model S19-110BFSS is all stainless steel.

### Pipe and Fittings

1¼" galvanized steel with BradTect® safety yellow coating. S19-110BFSS is all stainless steel.

### Water Supply


1¼" NPT (BSPP model only)

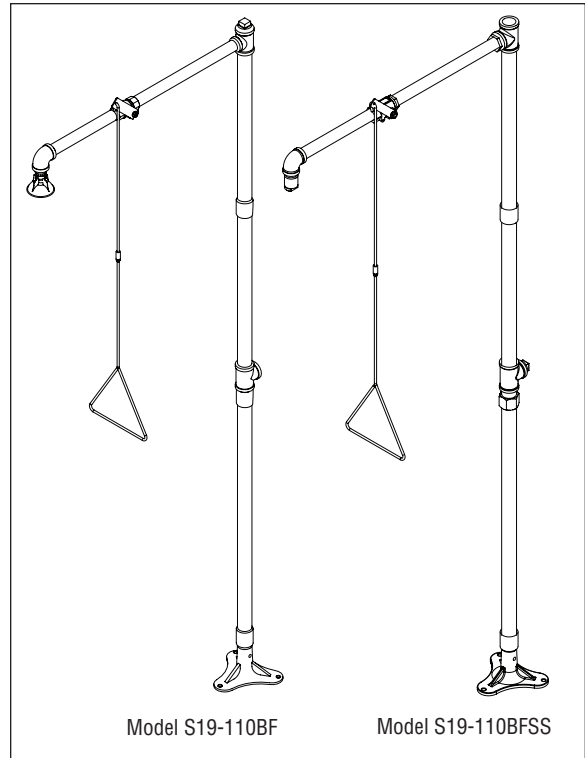


Model	Description
<input type="checkbox"/> S19-110BF	Freestanding Drench Shower (barrier-free model)
<input type="checkbox"/> S19-110BFSS	Freestanding Drench Shower (barrier-free model), All Stainless Steel
<input type="checkbox"/> S19-110BFSSZ	Freestanding Drench Shower (barrier-free model), All Stainless Steel w/ BSPP Connection/Certified to AS4775 & AS4020
<input type="checkbox"/> S19-2150	Navigator EFX20 - Emergency Thermostatic Mixing Valve

### Tepid Water Options

[Navigator S19-2150 EFX20  
Emergency Thermostatic Mixing Valve](#)



[Keltech SNA-Series  
Tankless Water Heater](#)





**NAVIGATOR**

Satisfies ANSI/ISEA Z358.1 tepid water requirements.



# S19-110BF, S19-110BFSS

## Freestanding Drench Shower

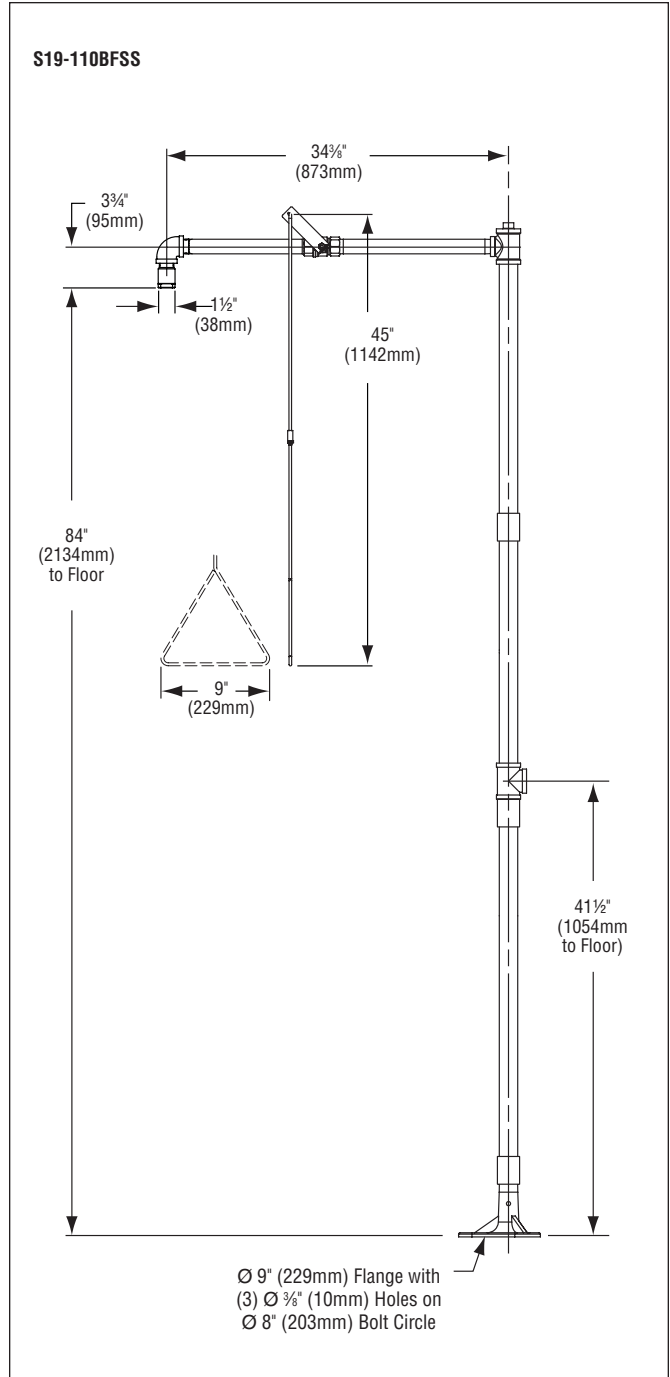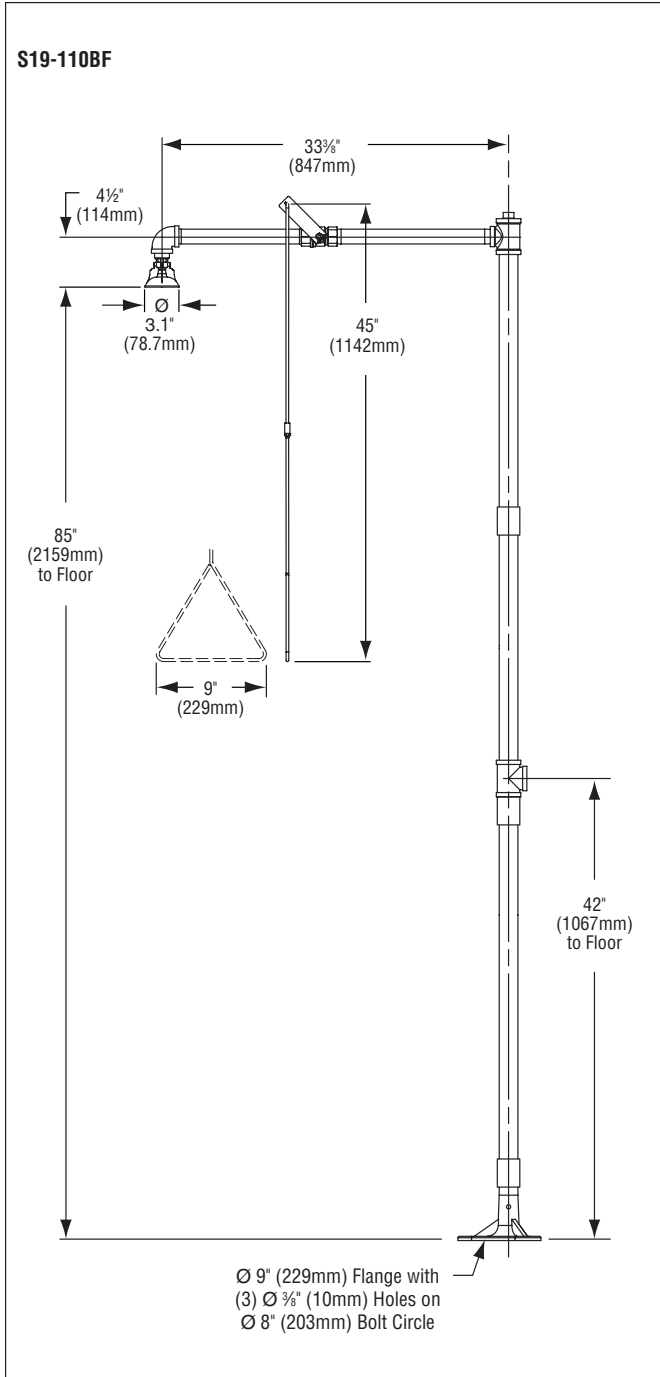

All dimensions assume standard thread engagement. Variations in manufacturing allow for +/- 1/8" (3mm) per threaded joint. To find the tolerance of a dimension, add the number of thread joints in between a dimension and multiply it by 1/8" (3mm).