

T67375▲




T67475▲



Submitted Model No.: _____

Specific Features: _____

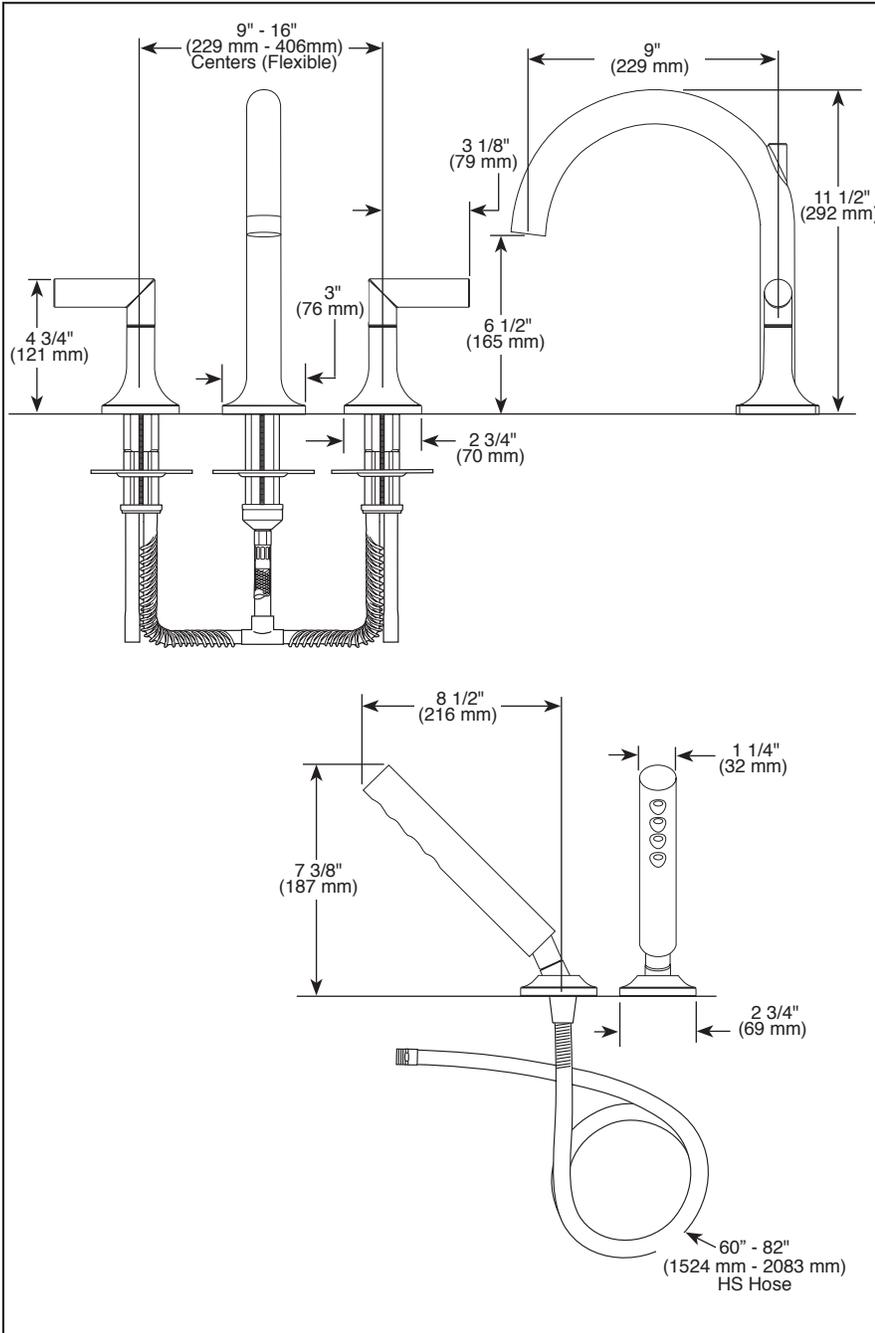

▲ Designate proper finish suffix

BRIZO®

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Odin® Bath Collection
- Three Hole Installation (T67375)
- Four Hole Installation (T67475)
- Rough-In Kit Must Also be Ordered to Complete Installation (R64707 for four hole and R62707 for three hole)

STANDARD SPECIFICATIONS:

- Three or four hole mount
- Trim Only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation (R64707 for four hole and R62707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
- Handshower includes double check valves for backflow prevention (T67475)
- Handshower max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Minimum 4 1/2" (114 mm) to maximum 10" (254 mm) distance between holes
- Accommodates up to 2 1/2" deck thickness

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1- Valve control only
- EPA WaterSense® - Applies to T67475▲ only