



California Faucets®

ASILOMAR®

CONTEMPORARY DECK MOUNT TUB FILLER WITH HANDSHOWER

Features

- Tub filler: Maximum flow rate: 15 gpm (56.8 L/min) at 60 psi
- Handshower flow rate: 2.0 gpm (7.6 L/min) or 1.8 gpm (6.8L/min)
- Handshower bracket may be placed on COLD or HOT side of body
- 1/4 turn ceramic disc cartridges
- All brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) / DOE (1.8 gpm and 2.0 gpm)
- Commonwealth of MA
- ADA compliant (with lever handles)
- EPA Watersense Handshower (2.0 gpm)
- Local codes may require installation of an upstream tempering valve


1108-XX.20
1108-XX.18



1108-65 shown



XX= DENOTES HANDLE SERIES

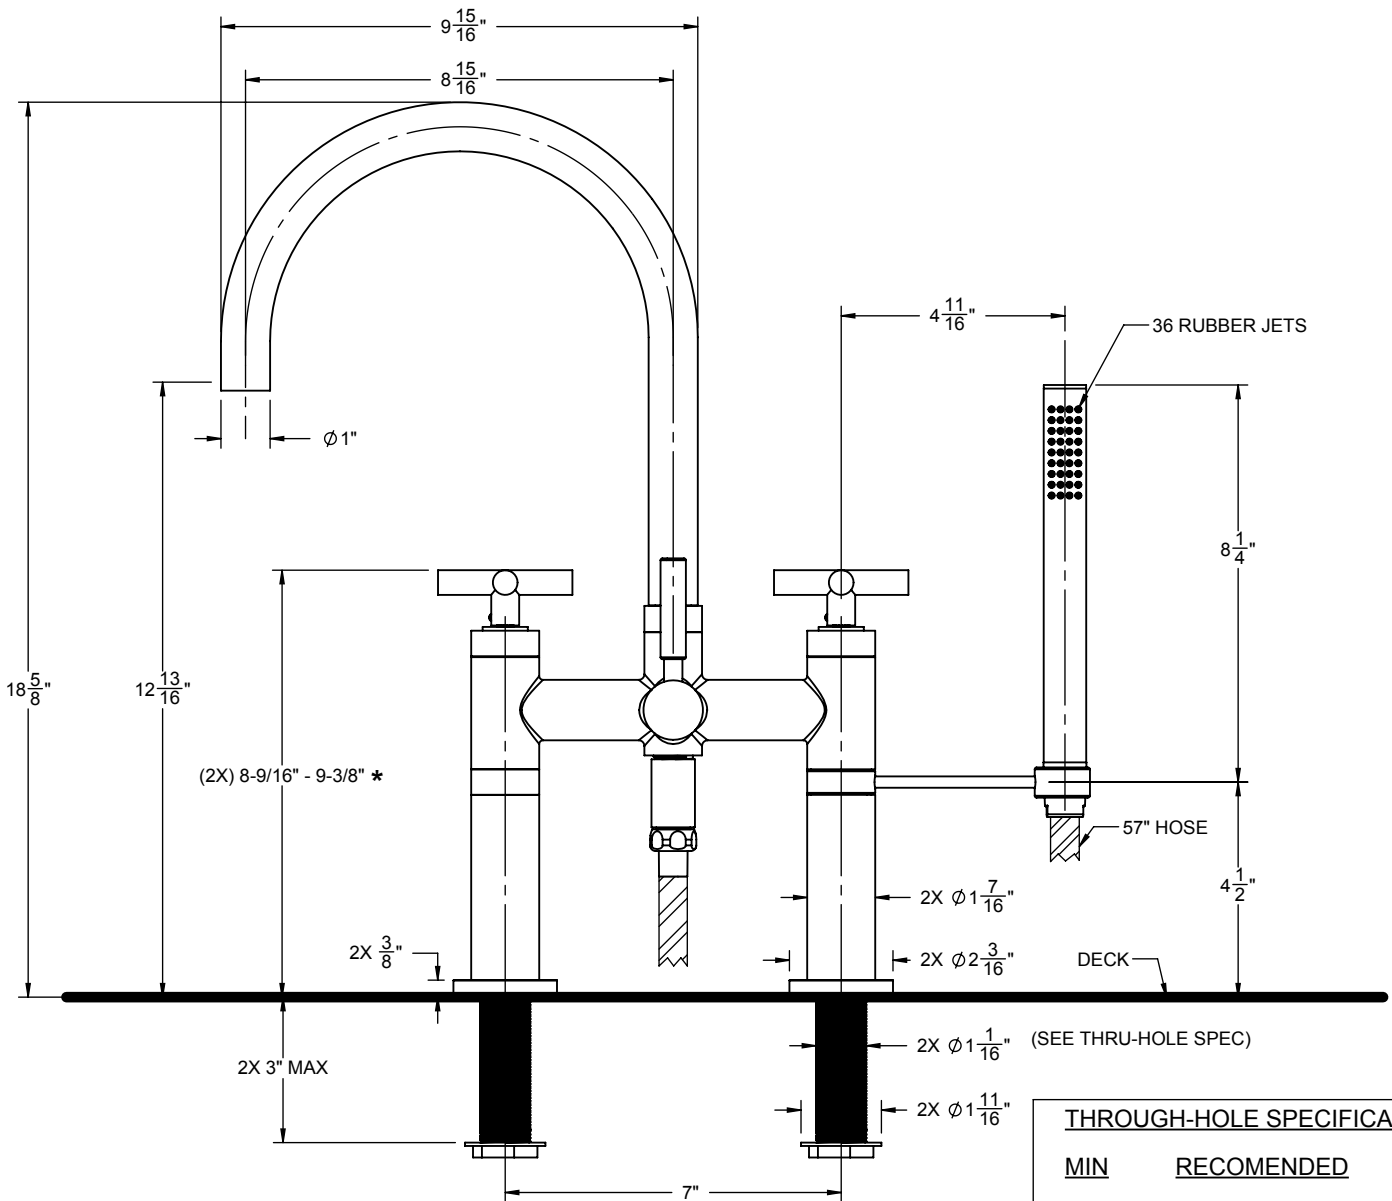

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMENDED	MAX
$\varnothing 1\text{-}1/16"$	$\varnothing 1\text{-}5/16"$	$\varnothing 1\text{-}3/8"$

* HEIGHT VARIES BASED ON HANDLE SERIES

ALL DIMENSIONS SHOWN TO NEAREST 1/16"