



California Faucets®

Balboa™

Deck Mount "Telephone" Handshower & Tub Filler

Features


- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Tub filler maximum flow rate: 13 gpm (49.2 L/min) at 60 psi
- Handshower flow rate: 2.0 gpm (7.6 L/min), 1.8 gpm (6.8 L/min)
- 1/4 turn ceramic disc cartridges

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- CEC (1.8 gpm) & DOE (1.8 & 2.0 gpm)
- Commonwealth of MA
- EPA WaterSense handshower (2.0 gpm)
- ADA compliant (with lever handles)
- Installation of upstream tempering device may be required (verify local codes)

1508-XX.18
1508-XX.20


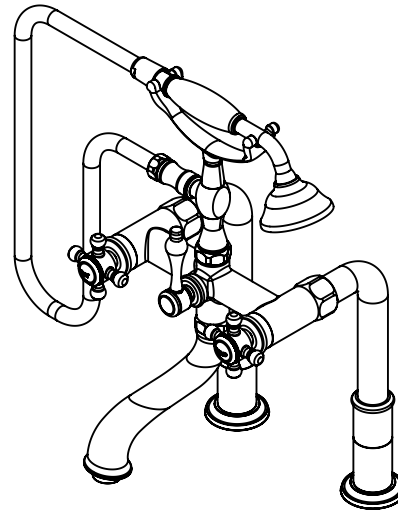


1508-47.FR-ZZ shown



XX = Denotes handle style

Handle Series	Dim. A
33	13-15/16" [354]
34	9-5/16" [236]
35	14" [355]
46	13-13/16" [351]
47	9-3/4" [248]
48	13-1/4" [337]
48X	10" [254]
55	13-5/8" [346]
60	9-1/2" [242]
61	13-5/16" [338]
61XD	9-3/4" [247]
64	13-7/8" [352]
68	13-5/8" [346]

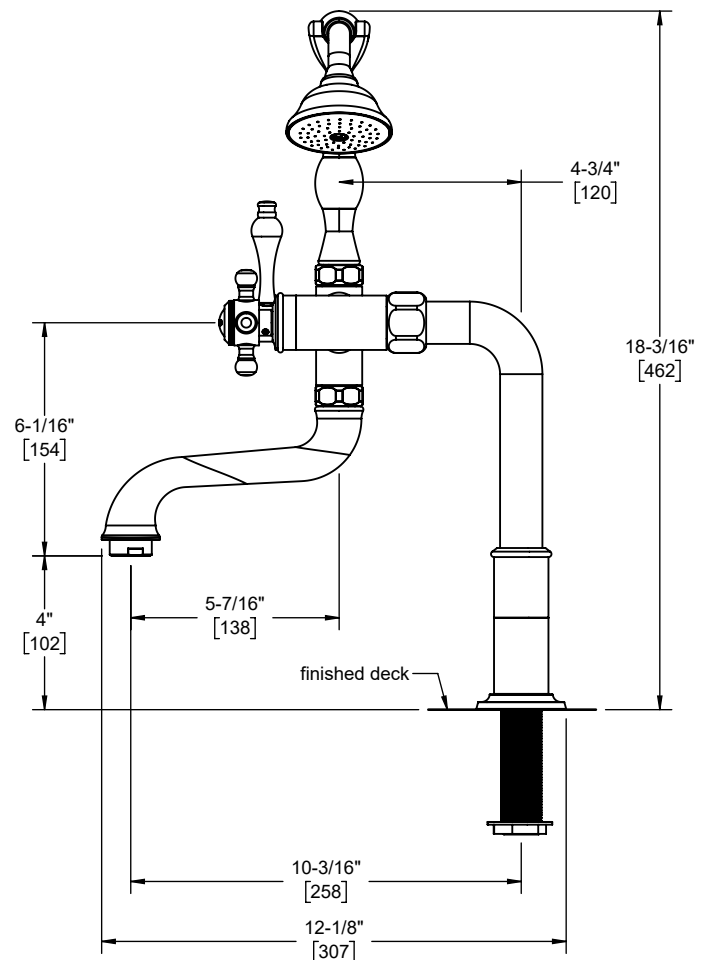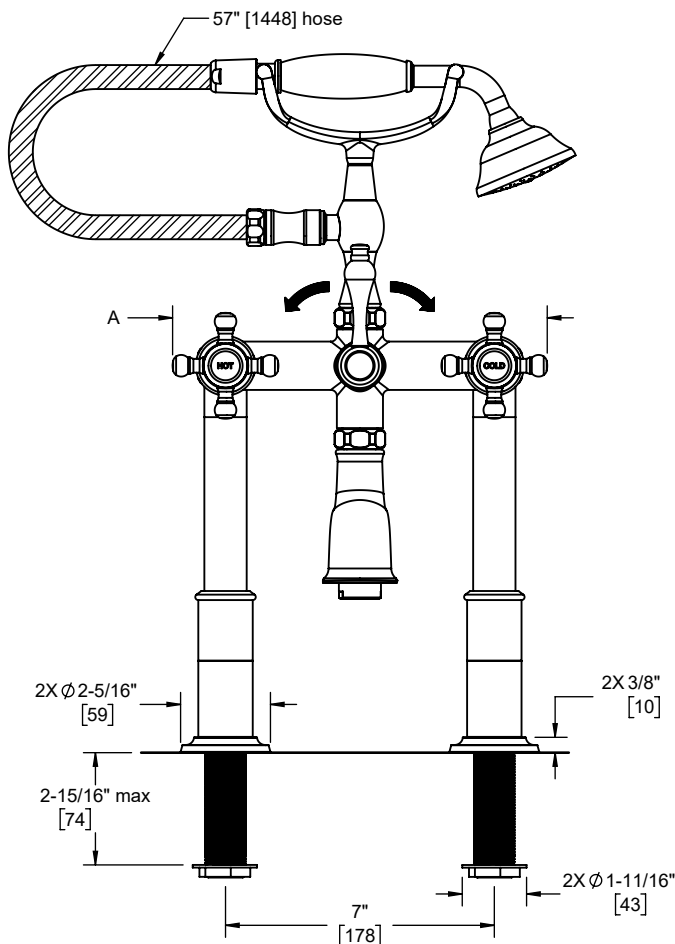

Through-Hole Specifications

Min	Recommended	Max
Ø 1-1/16" [27]	Ø 1-5/16" [33]	Ø 1-3/8" [35]

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice