



Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- Φ 1-1/4" all brass touch style pop up drain assembly
- 1.2gpm (4.5 L/min) max flow rate

**4102M
4102M-XX**

Codes/Standards Applicable

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant



4102M shown



XX = Denotes handle insert style

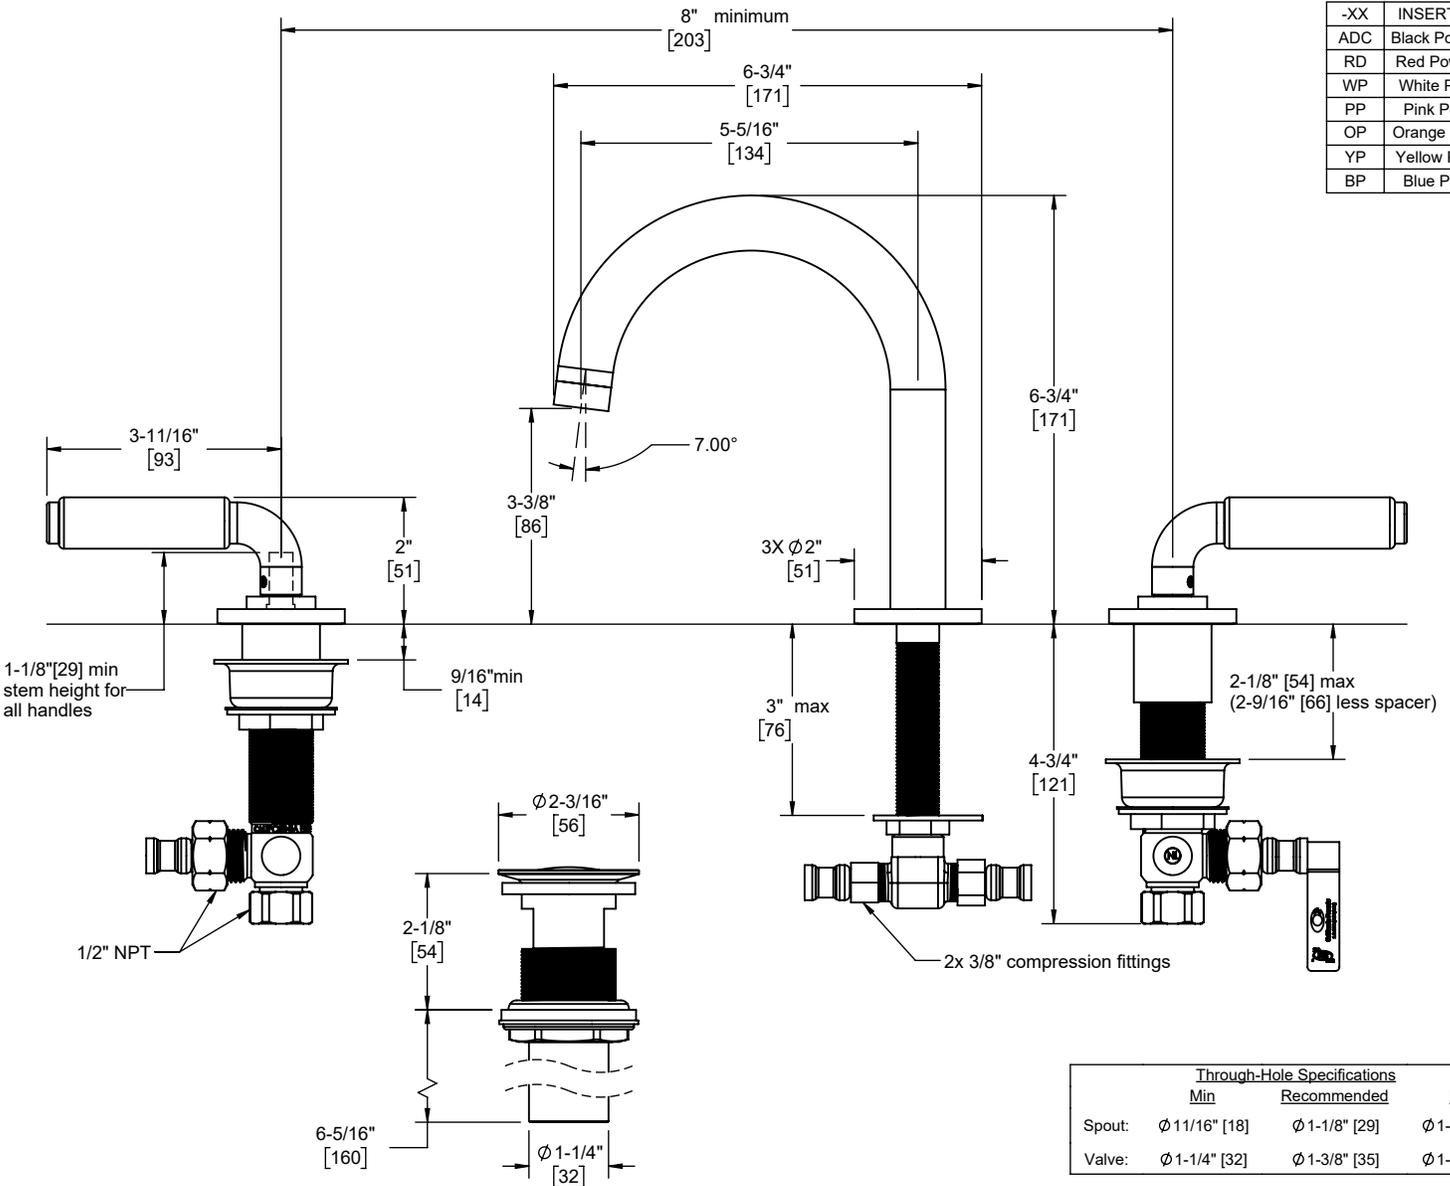

| -XX | INSERT STYLE |
|-----|------------------|
| ADC | Black Powdercoat |
| RD | Red Powdercoat |
| WP | White Porcelain |
| PP | Pink Porcelain |
| OP | Orange Porcelain |
| YP | Yellow Porcelain |
| BP | Blue Porcelain |

| | Through-Hole Specifications | | |
|--------|-----------------------------|--------------------|--------------------|
| | Min | Recommended | Max |
| Spout: | Φ 11/16" [18] | Φ 1-1/8" [29] | Φ 1-1/2" [38] |
| Valve: | Φ 1-1/4" [32] | Φ 1-3/8" [35] | Φ 1-1/2" [38] |

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]