

Features

- 25+ artisan finishes including 11 PVD finishes
- All brass construction
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- Φ 1-1/4" all brass touch style pop up drain assembly
- 1.2gpm (4.5 L/min) max flow rate

Codes/Standards Applicable


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant



4102 shown

XX = Denotes handle insert style

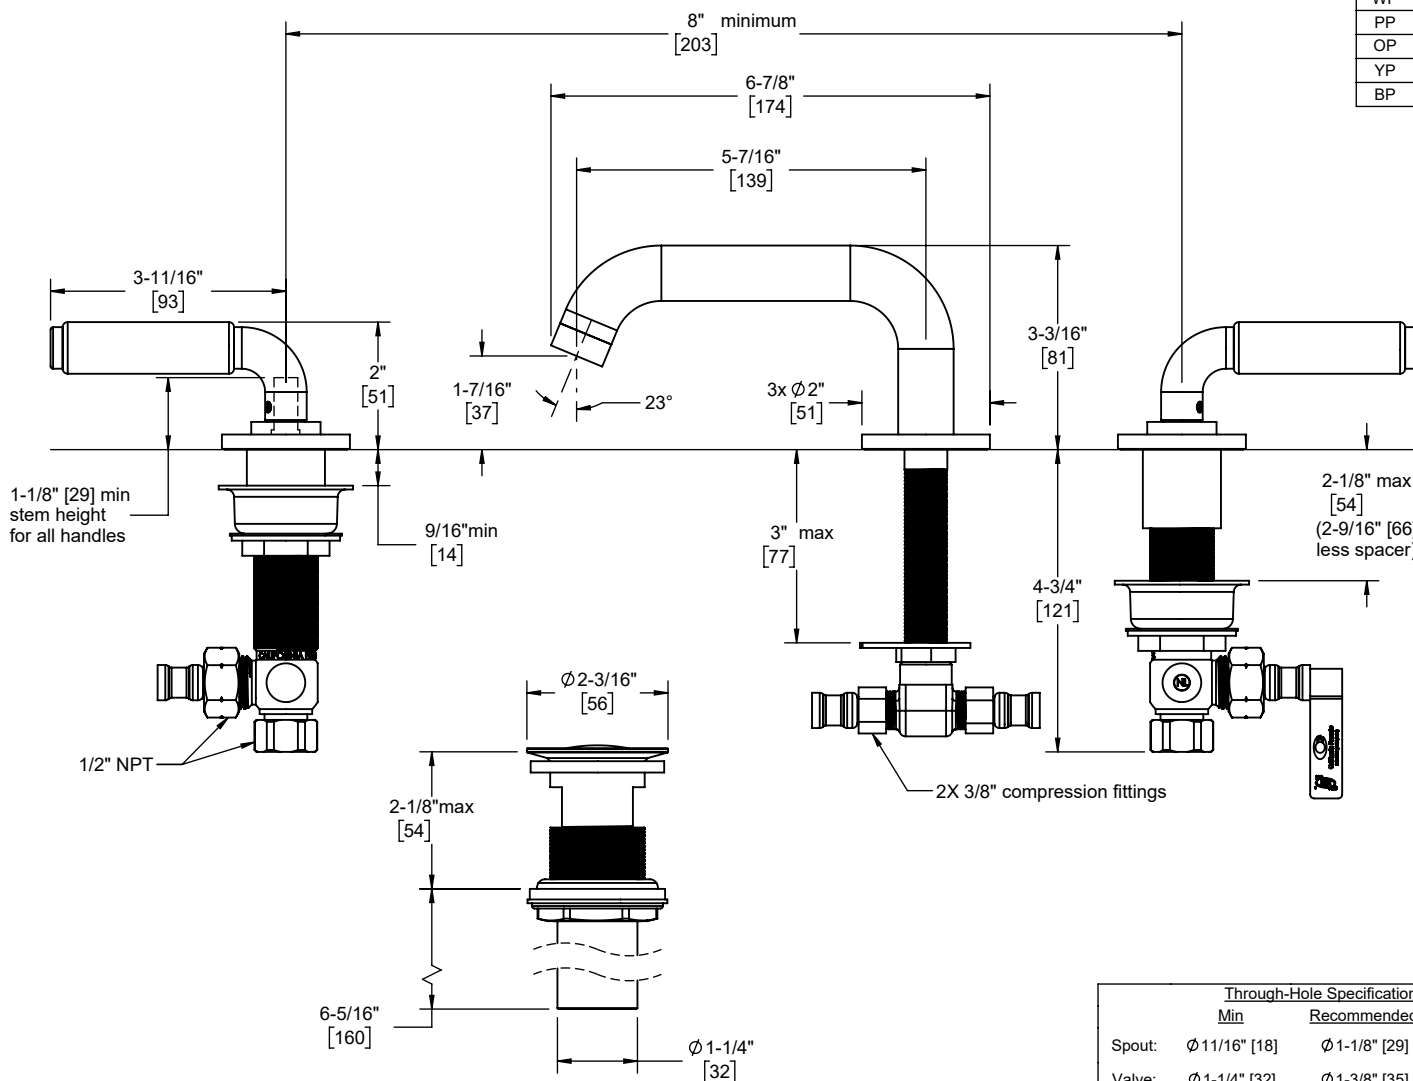

-XX	INSERT STYLE
ADC	Black Powdercoat
RD	Red Powdercoat
WP	White Porcelain
PP	Pink Porcelain
OP	Orange Porcelain
YP	Yellow Porcelain
BP	Blue Porcelain

Through-Hole Specifications			
	Min	Recommended	Max
Spout:	Φ 11/16" [18]	Φ 1-1/8" [29]	Φ 1-1/2" [38]
Valve:	Φ 1-1/4" [32]	Φ 1-3/8" [35]	Φ 1-1/2" [38]