



**Features**

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- 16gpm (60.6 L/min) max flow rate
- Comes as complete set with trim and valves

**4108Q**  
**4108Q-XX**

**Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- Commonwealth of MA
- ADA compliant
- Installation of upstream tempering device may be required (verify local codes)




4108Q shown

XX = Denotes handle insert style



-XX	INSERT STYLE
ADC	Black Powdercoat
RD	Red Powdercoat
WP	White Porcelain
PP	Pink Porcelain
OP	Orange Porcelain
YP	Yellow Porcelain
BP	Blue Porcelain

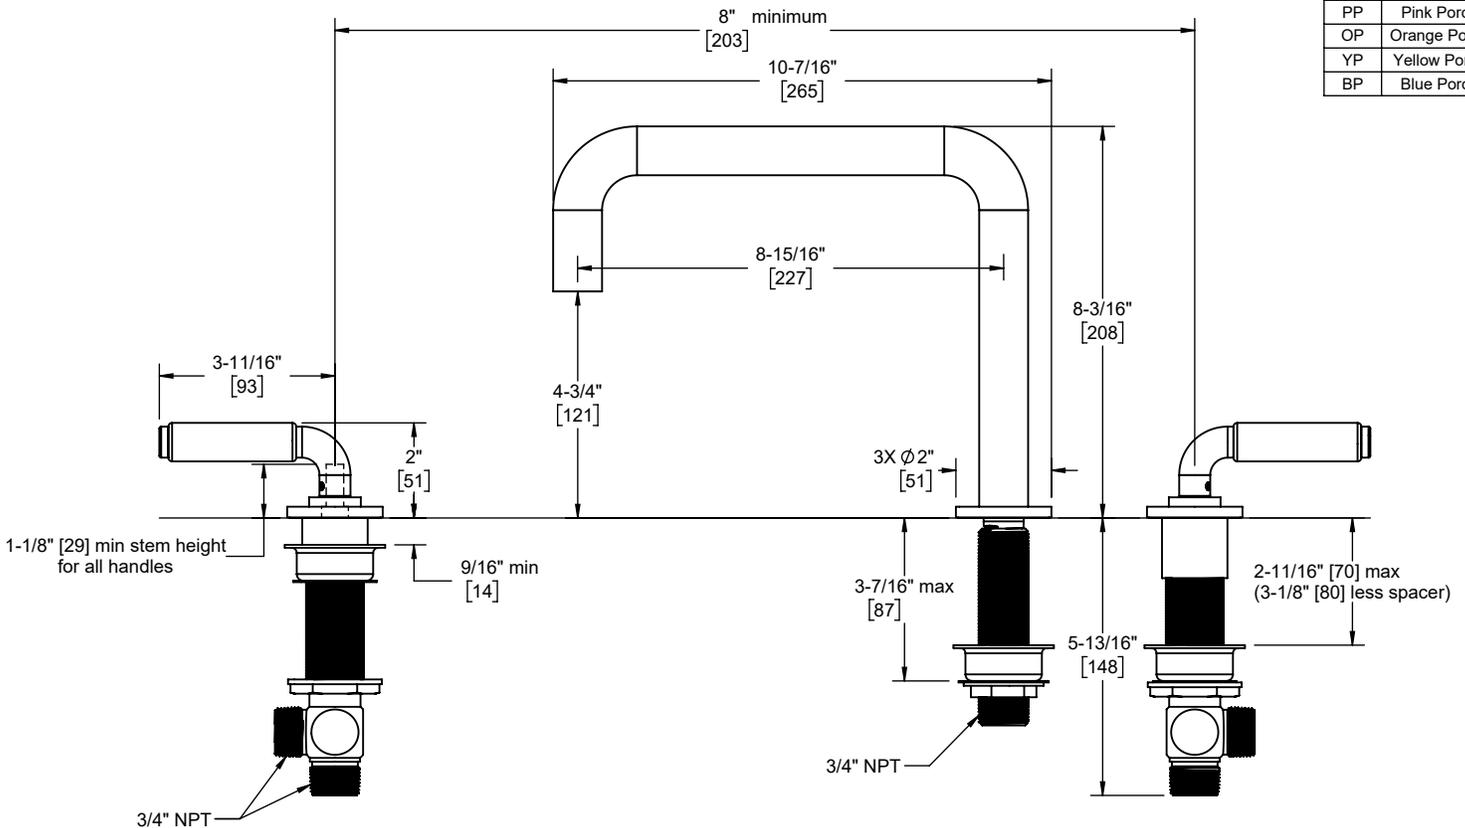

Through-Hole Specifications		
Min	Recommended	Max
Spout: Ø1-1/16" [27]	Ø1-3/8" [35]	Ø1-1/2" [38]
Valve: Ø1-3/8" [35]	Ø1-1/2" [38]	Ø1-1/2" [38]

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]