



**Features**

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- 1/4" compression inlet
- Max flow rate: 1.8 gpm (6.8 L/min)
- Ceramic disc cartridge
- **Not** compatible with RO filter units

**Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9620Q-K51-FB shown




9620Q-K51-ST shown

9620Q-K51-ST  
 9620Q-K51-BST  
 9620Q-K51-FB  
 9620Q-K51-BFB



Handle Style	A	B
ST BST	4-1/4" [108]	2-1/2" [64]
FB BFB	4-5/16" [110]	2-7/16" [62]

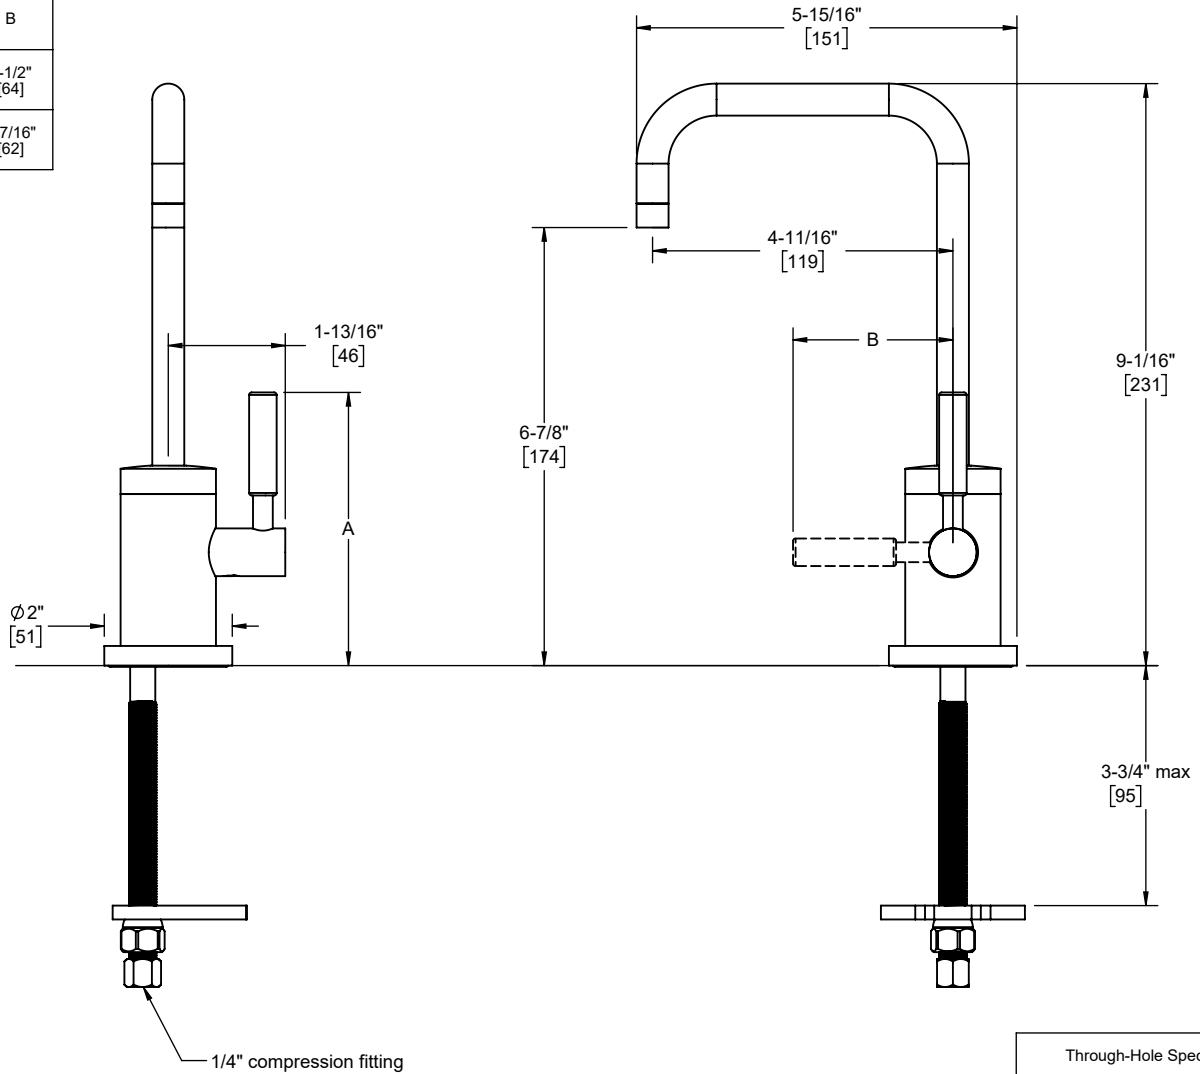

Through-Hole Specifications		
Min	Recommended	Max
$\phi 1/2''$ [13]	$\phi 1''$ [25]	$\phi 1-1/2''$ [38]