



California Faucets®

**COTO™**

## Stainless Steel Combo Hot & Cold Water Dispenser

### Features

- 7 artisan finishes including 4 PVD finishes
- 316 stainless steel construction
- Excellent corrosion resistance, for indoor or outdoor use
- Insulated to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- Requires Hot Water Tank (9628SS) sold separately

### Codes/Standards Applicable


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant

**9623-K90-BQ**



Through-Hole Specifications		
Min	Recommended	Max
Ø 1-3/8" [35]	Ø 1-3/8" [35]	Ø 1-5/8" [41]

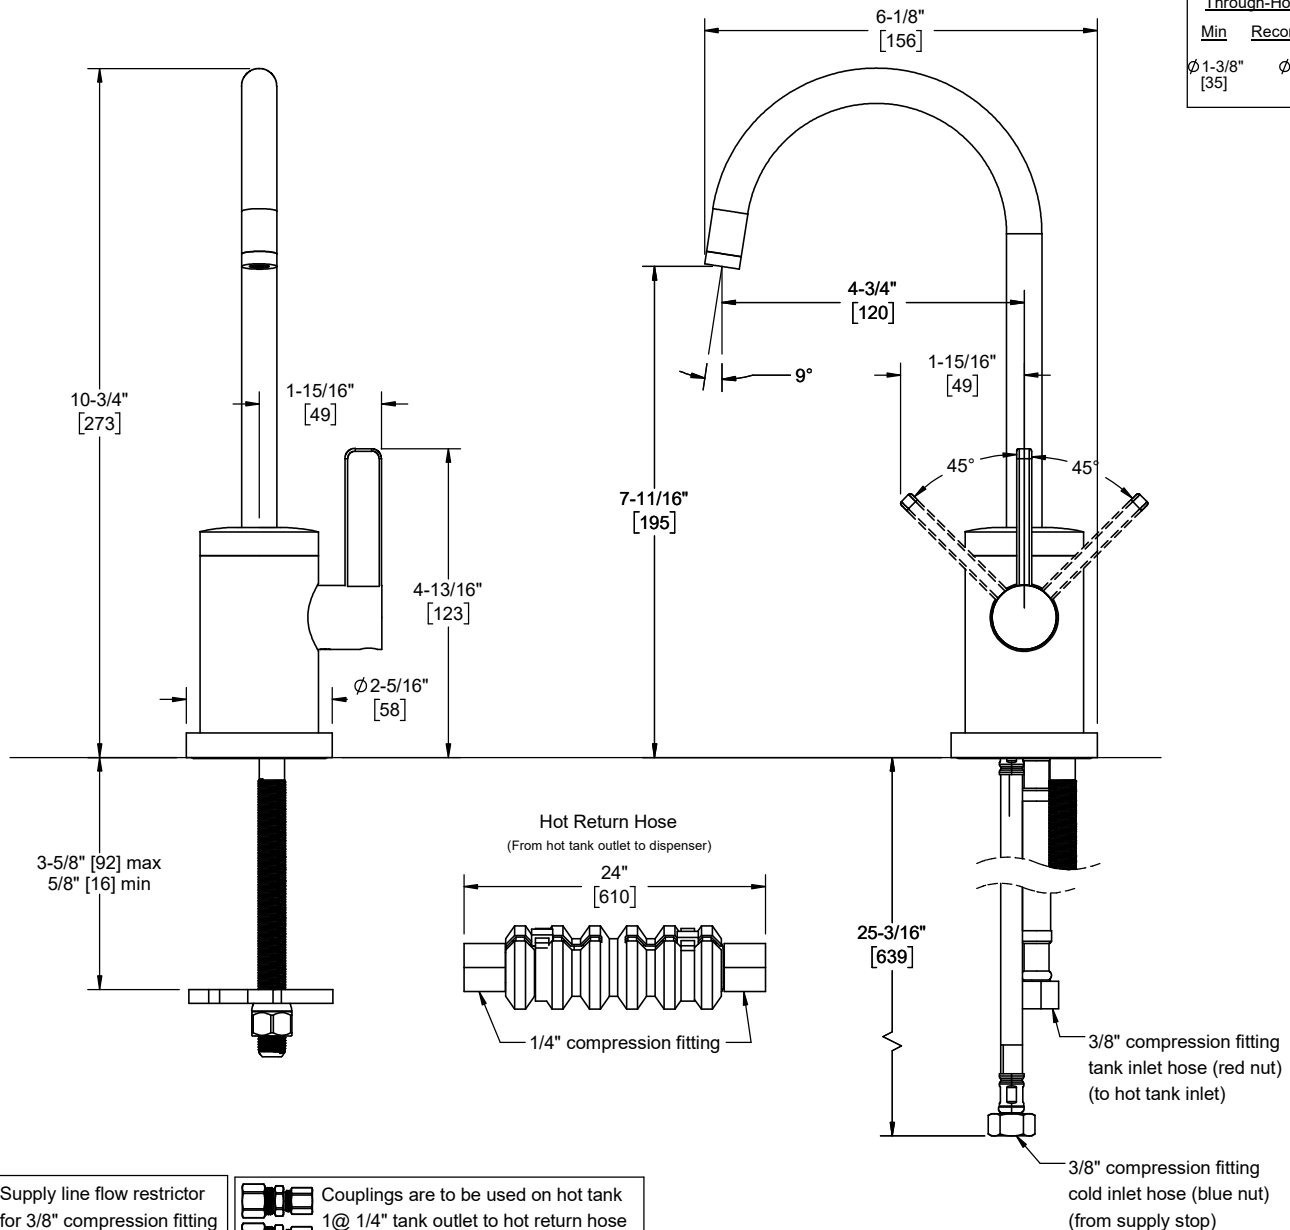

Supply line flow restrictor  
for 3/8" compression fitting  
9/16"-24 male x female



Couplings are to be used on hot tank  
1@ 1/4" tank outlet to hot return hose  
1@ 3/8" tank inlet to tank inlet hose

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]