



California Faucets®

Descanso®

Single Handle Combo Hot & Cold Water Dispenser

Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- **Not** compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9623Q-K30-SL shown

9623Q-K30-SL
 9623Q-K30-FL
 9623Q-K30-KL
 9623Q-K30-TL

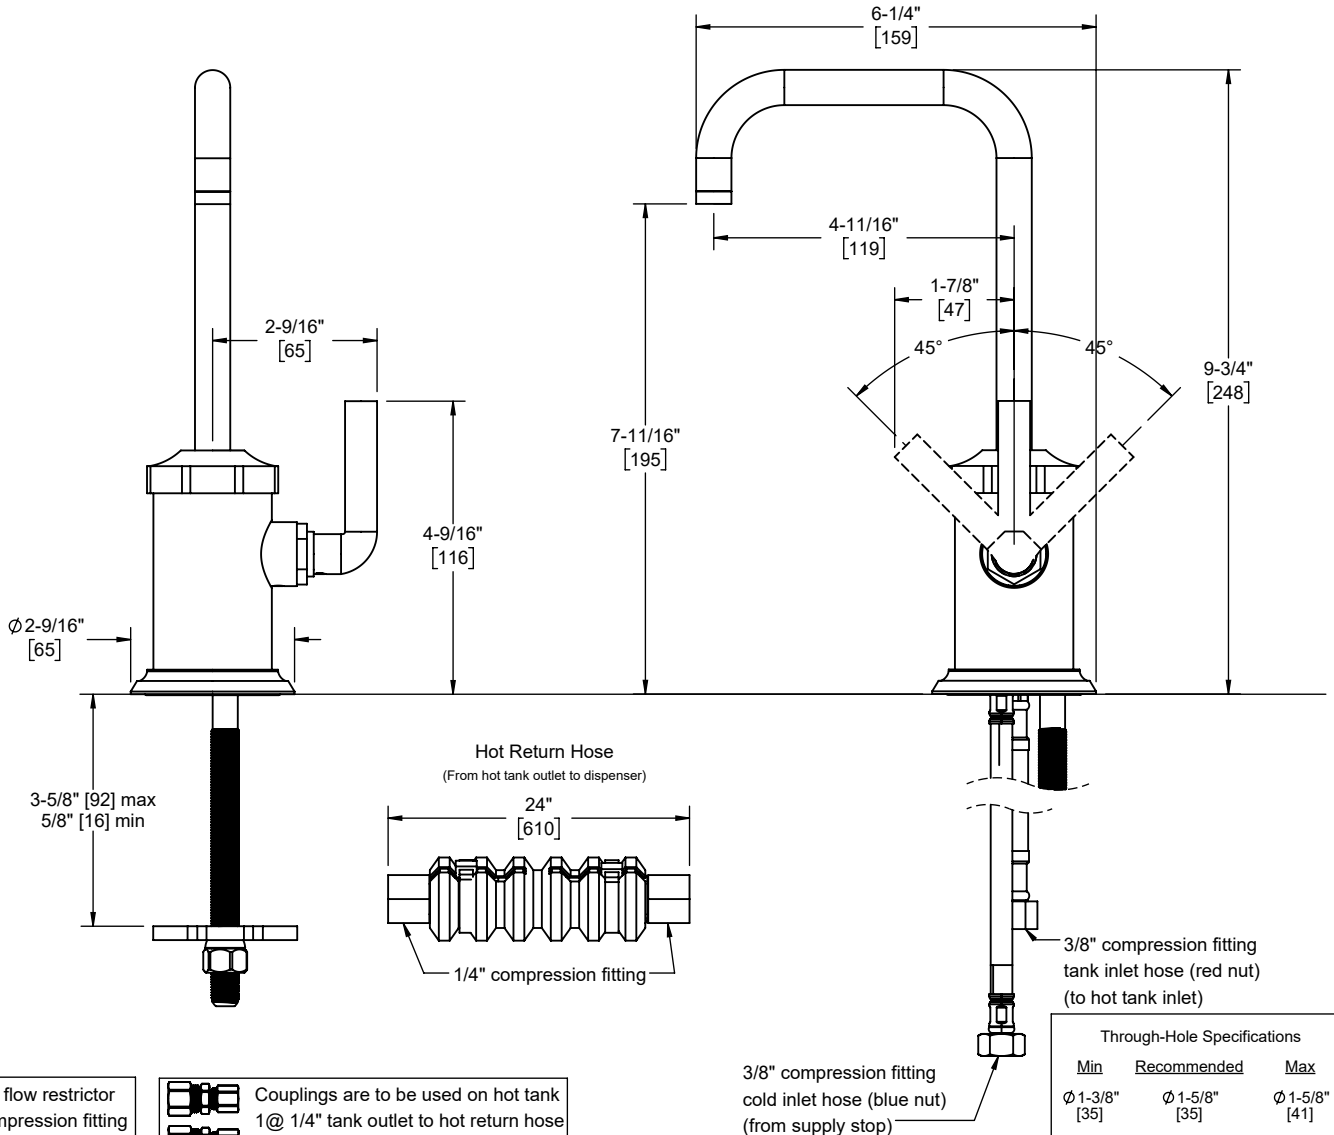

Supply line flow restrictor for 3/8" compression fitting 9/16"-24 male x female

Couplings are to be used on hot tank
 1@ 1/4" tank outlet to hot return hose
 1@ 3/8" tank inlet to tank inlet hose

Through-Hole Specifications		
Min	Recommended	Max
Ø 1-3/8" [35]	Ø 1-5/8" [35]	Ø 1-5/8" [41]

3/8" compression fitting cold inlet hose (blue nut) (from supply stop)

3/8" compression fitting tank inlet hose (red nut) (to hot tank inlet)

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16" [Dimensions in brackets are mm, rounded to 1mm]