California Faucets®

La Spezia™

Single Handle Combo Hot & Cold Water Dispenser

Features

9623Q-K55-TG

- *25+ artisan finishes including 12 PVD finishes*
- *All brass construction*
- *Insulated to reduce heat to faucet*
- *Self-Closing for hot water*
- *Max flow rate: 1.0 gpm (3.8 L/min)*
- ***Not** compatible with RO filter units*
- *Requires Hot Water Tank (9628SS) sold separately*

Codes/Standards Applicable

Product meets or exceeds the following:

- *ASME A112.18.1/CSA B125.1*
- *NSF 61, NSF 372, CEC, & DOE*
- *Commonwealth of MA*
- *ADA compliant*

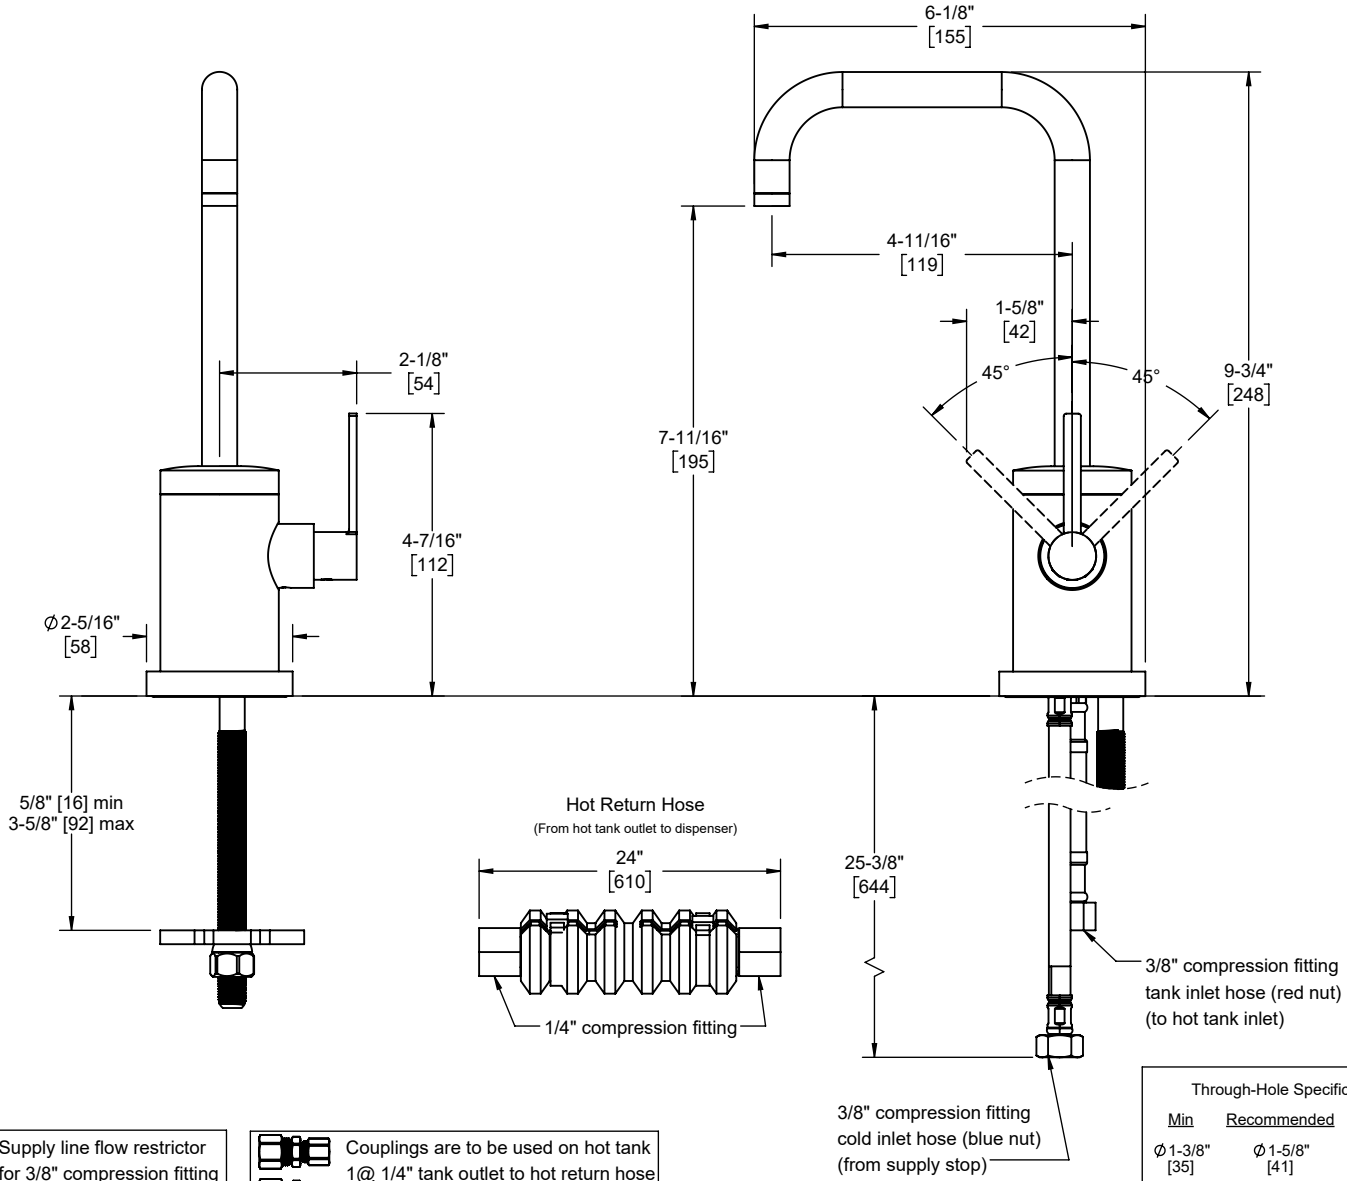

Through-Hole Specifications		
Min	Recommended	Max
Ø1-3/8" [35]	Ø1-5/8" [41]	Ø1-5/8" [41]

Supply line flow restrictor for 3/8" compression fitting 9/16"-24 male x female

Couplings are to be used on hot tank
1@ 1/4" tank outlet to hot return hose
1@ 3/8" tank inlet to tank inlet hose

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]