



California Faucets®

**Davoli**®

Hot Water Dispenser

**Features**

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing handle
- Max flow rate: 1.0 gpm (3.8 L/min)
- **Not** compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

**Codes/Standards Applicable**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant




9625-K10-61 shown

9625Q-K10-33  
 9625Q-K10-35  
 9625Q-K10-48  
 9625Q-K10-61



Handle Style	A	B
33	4-3/8" [111]	2-1/2" [64]
35	4-3/8" [111]	2-1/2" [64]
48	4-3/8" [111]	2-1/2" [64]
61	4-5/16" [110]	2-1/2" [63]

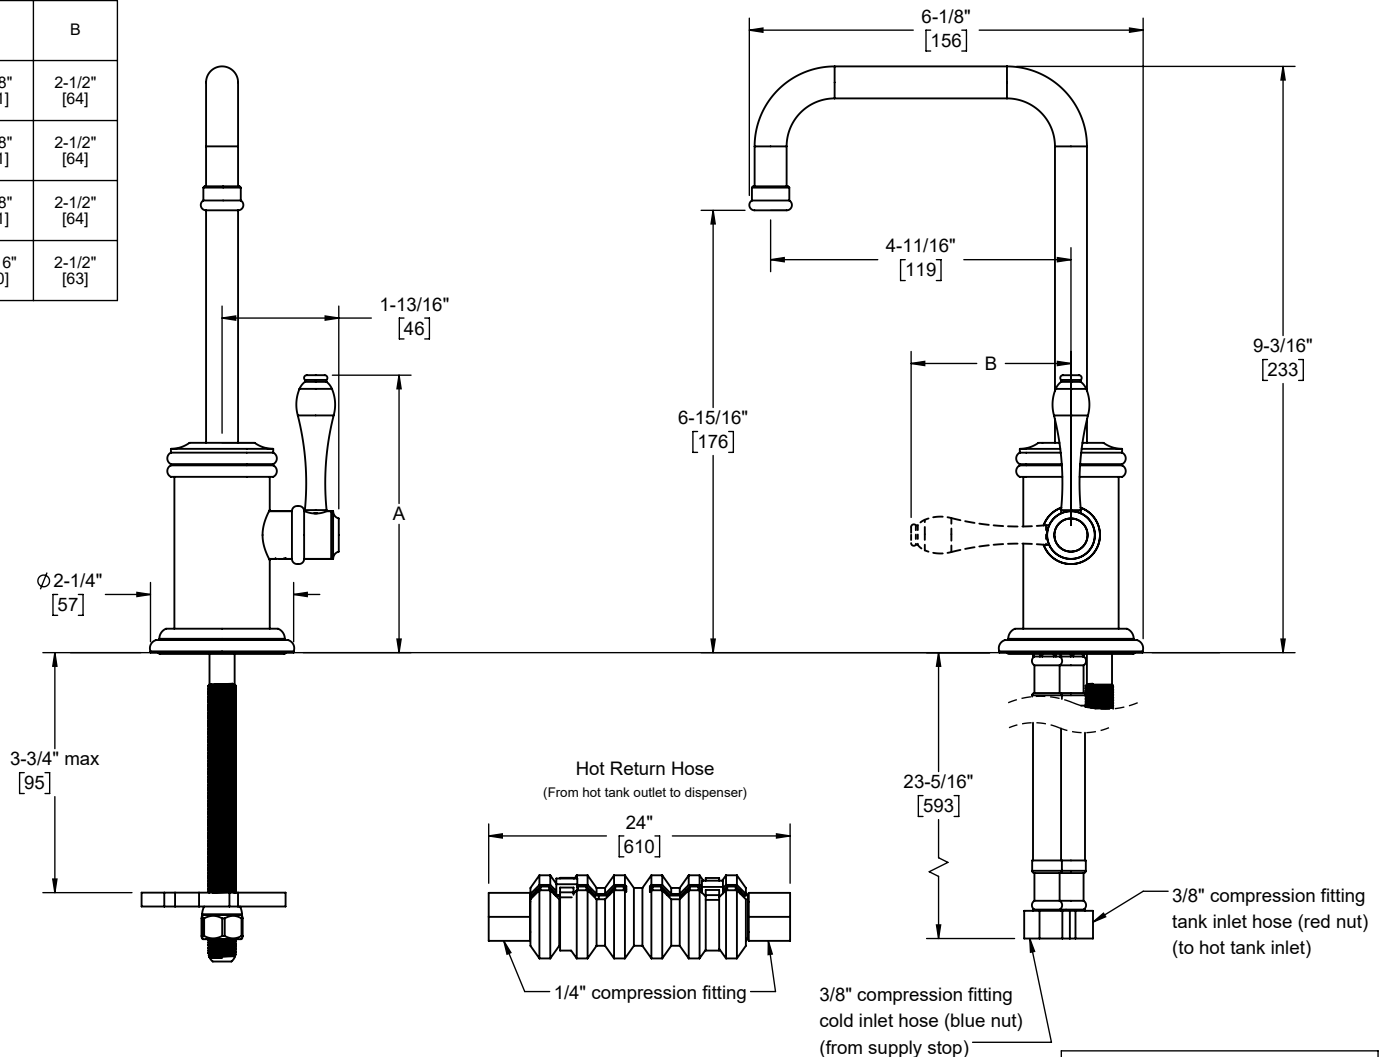

Supply line flow restrictor for 3/8" compression fitting 9/16"-24 male x female

Couplings are to be used on hot tank  
 1@ 1/4" tank outlet to hot return hose  
 1@ 3/8" tank inlet to tank inlet hose

Through-Hole Specifications		
Min	Recommended	Max
Ø1-1/4" [32]	Ø1-3/8" [35]	Ø1-1/2" [38]

Dimensions are inches, rounded to 1/16"  
 [Dimensions in brackets are mm, rounded to 1mm]

Specifications subject to change without notice