



California Faucets®

Descanso®

Hot Water Dispenser

Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing handle
- Max flow rate: 1.8 gpm (6.8 L/min)
- **Not** compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable



Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9625Q-K30-SL shown

9625Q-K30-SL
 9625Q-K30-KL
 9625Q-K30-FL
 9625Q-K30-TL

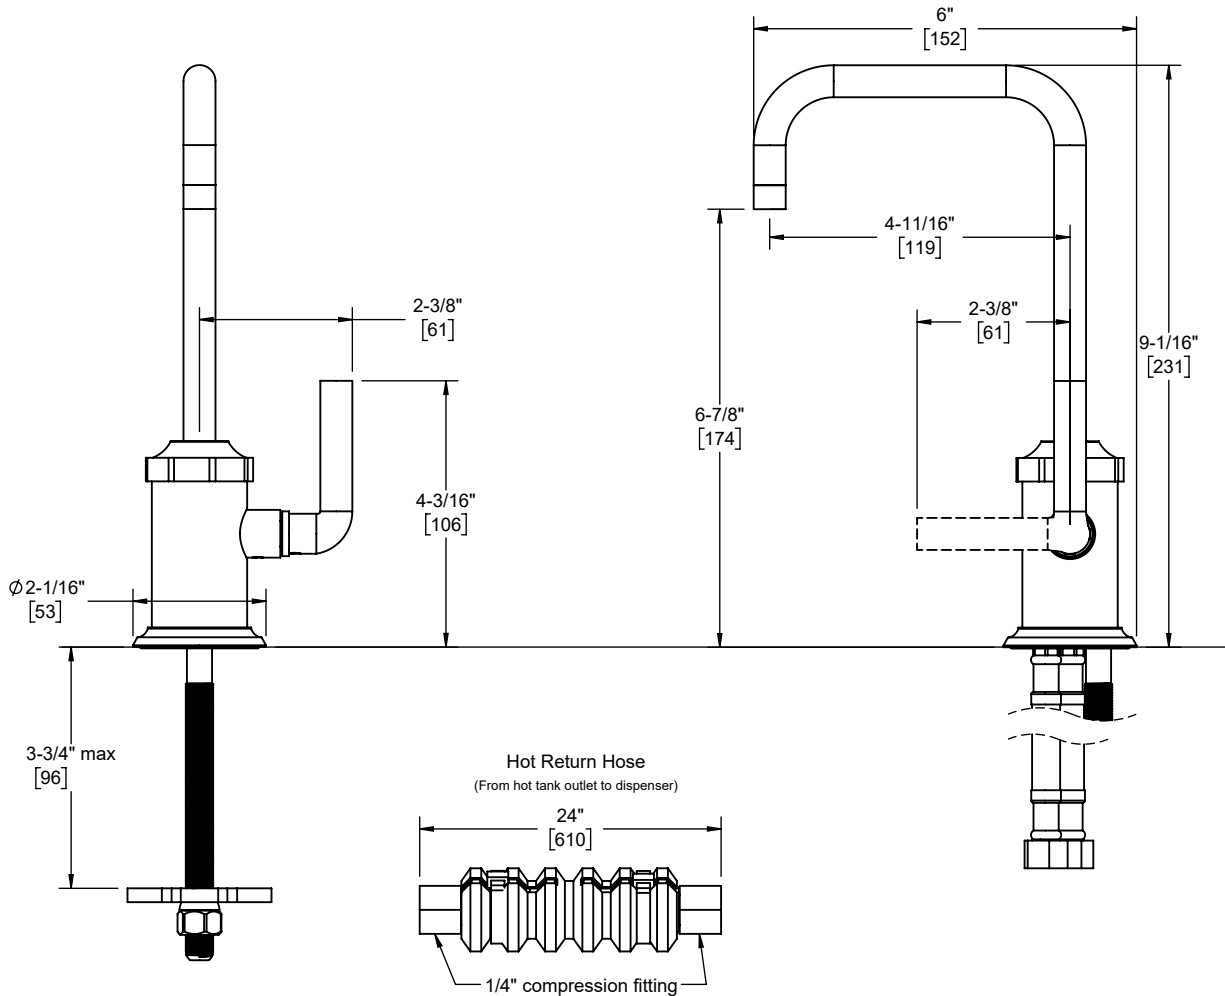

Supply line flow restrictor
 for 3/8" compression fitting
 9/16"-24 male x female



Couplings are to be used on hot tank
 1@ 1/4" tank outlet to hot return hose
 1@ 3/8" tank inlet to tank inlet hose

Specifications subject to change without notice

Through-Hole Specifications		
Min	Recommended	Max
ϕ 1-1/4" [32]	ϕ 1-3/8" [35]	ϕ 1-1/2" [38]

Dimensions are inches, rounded to 1/16"
 [Dimensions in brackets are mm, rounded to 1mm]