



California Faucets®

# Descanso Works®

## Hot Water Dispenser

### 9625Q-K81-BL




#### Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing handle
- Max flow rate: 1.0 gpm (3.8 L/min)
- **Not** compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

#### Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant

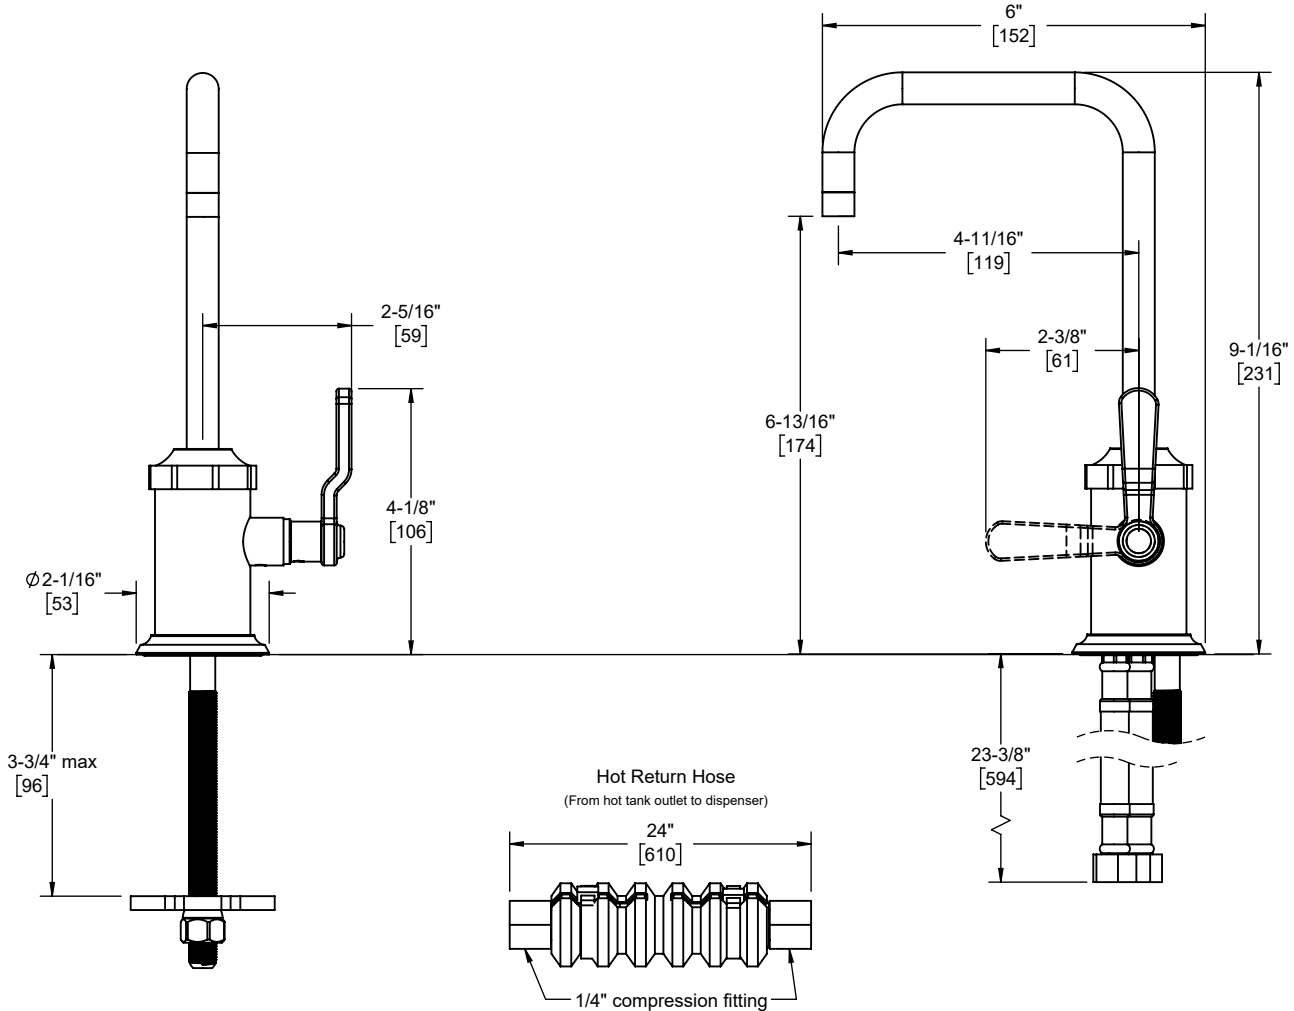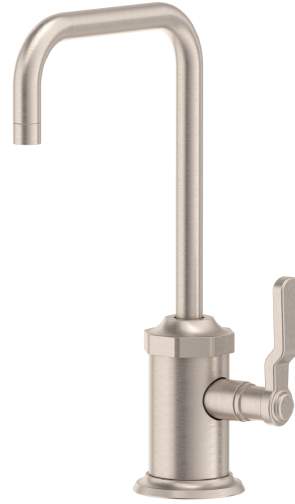

Supply line flow restrictor for 3/8" compression fitting  
9/16"-24 male x female



Couplings are to be used on hot tank  
1@ 1/4" tank outlet to hot return hose  
1@ 3/8" tank inlet to tank inlet hose

Specifications subject to change without notice

Through-Hole Specifications		
Min	Recommended	Max
$\text{Ø} 1-1/4''$ [32]	$\text{Ø} 1-3/8''$ [35]	$\text{Ø} 1-1/2''$ [38]

Dimensions are inches, rounded to 1/16"  
[Dimensions in brackets are mm, rounded to 1mm]