



Features

- 6-3/8" spout center to center
- 1/4 turn ceramic disc cartridge(s)
- Flexible braided hoses for ease of installation
- ϕ 1-1/4" all brass lift rod style pop up drain assembly
- 1.2 gpm (4.5 L/min) max flow rate Solid brass construction
- Over 30 finishes including 15 PVD finishes

Codes/Standards

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1 NSF/ANSI 61 & NSF/ANSI 372
- CEC
- EPA WaterSense High Efficiency Lavatory
- ADA compliant



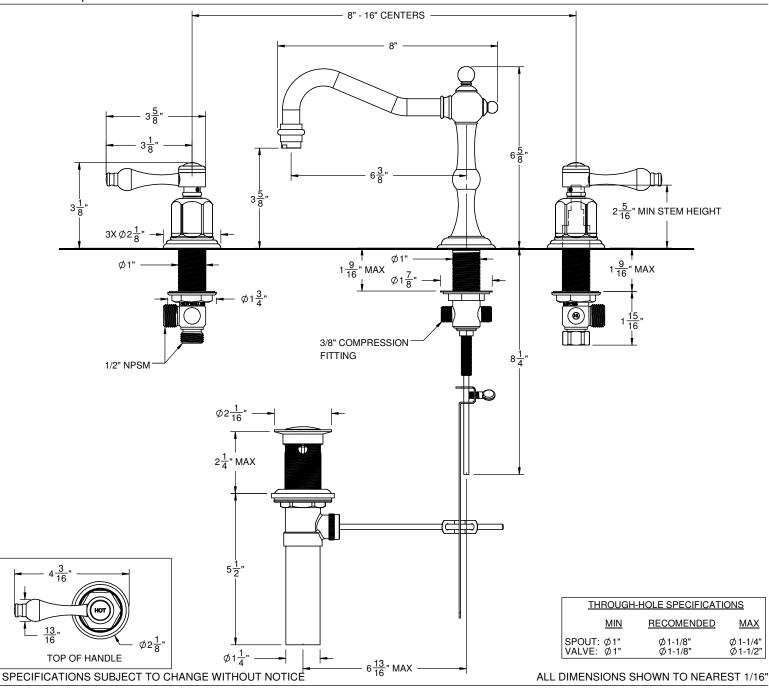

CF-3602 sp 170426

Encinitas[™]

WIDESPREAD LAVATORY FAUCET