



## CONTEMPORARY HOT ONLY WATER DISPENSER


## **Features**

- All brass construction
- 360° rotating spout
- Insulated body and spout to reduce heat transfer to faucet
- Self-closing handle
- Max flow rate 1.8 gpm (6.8 L /min); varies with hot water tank Over 30 finishes including 15 PVD finishes
- Requires Hot Water Tank (9628SS) sold separately

## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61 and NSF 372 CEC/ DOE
- Commonwealth of MA
- ADA compliant




CF-9625-K50-BST CF-9625-K50-ST



CF-9625-K50-ST shown

XX = DENOTES HANDLE STYLE

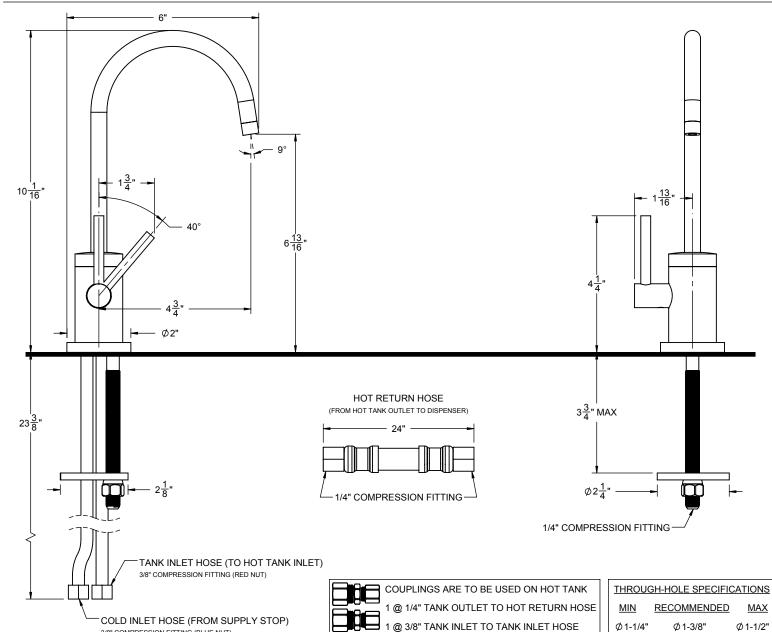

3/8" COMPRESSION FITTING (BLUE NUT)

Ø 1-3/8"

Ø 1-1/2"