




California Faucets®

**Descanso™**

**WALL LAVATORY**

**Features**

- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

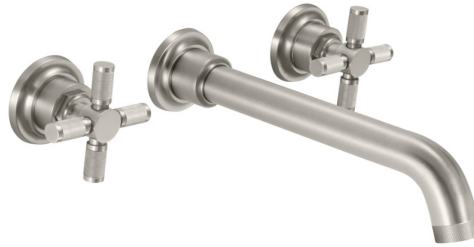



(CF-TO-V3002XK-9 SHOWN)

**CF-TO-V3002X-7/9**  
**CF-TO-V3002XK-7/9**  
**CF-TO-V3002XF-7/9**

**Codes/Standards**

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC & DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory

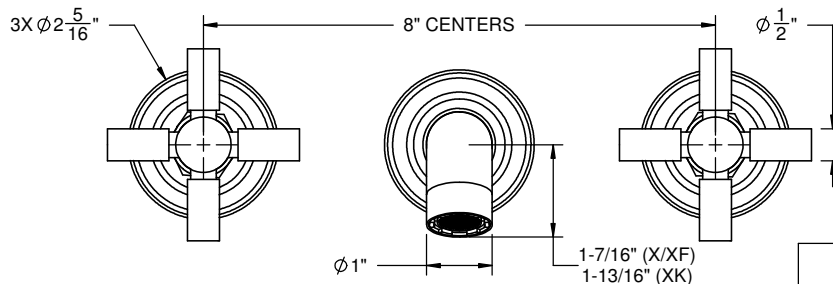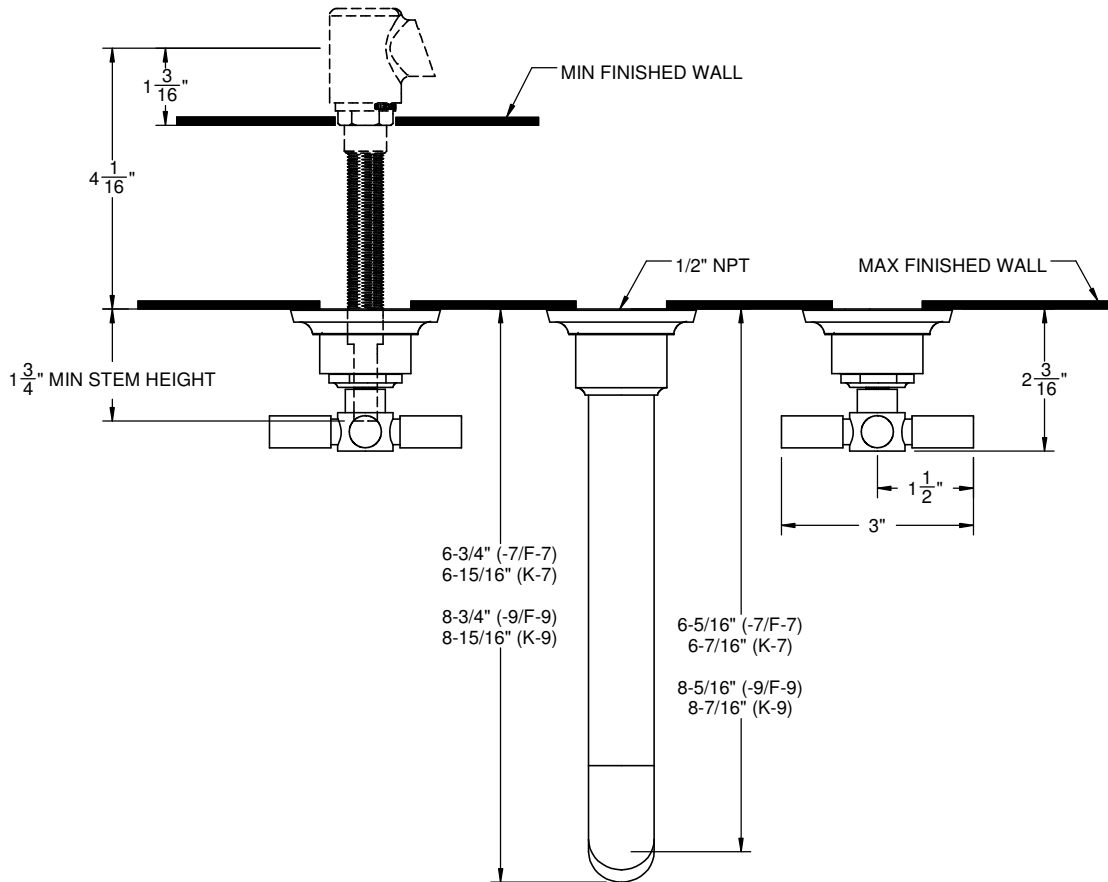

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
SPOUT: $\phi 1$ "	$\phi 1\text{-}1/4$ "	$\phi 1\text{-}15/16$ "
VALVE: $\phi 1\text{-}1/4$ "	$\phi 1\text{-}1/4$ "	$\phi 1\text{-}15/16$ "

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ALL DIMENSIONS SHOWN TO NEAREST 1/16"