



California Faucets®

Solimar™

WALL LAVATORY

CF-TO-V7002-9


Features

- 8-1/2" spout wall to center
- 1.2 gpm (4.5 L/min) max flow rate
- Rough valve (CF-VL-R) sold separately
- Solid brass construction
- Over 30 finishes including 15 PVD finishes


Codes/Standards

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC
- ADA compliant

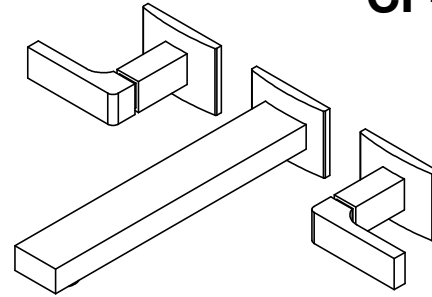

CF-TO-V7002-9 shown

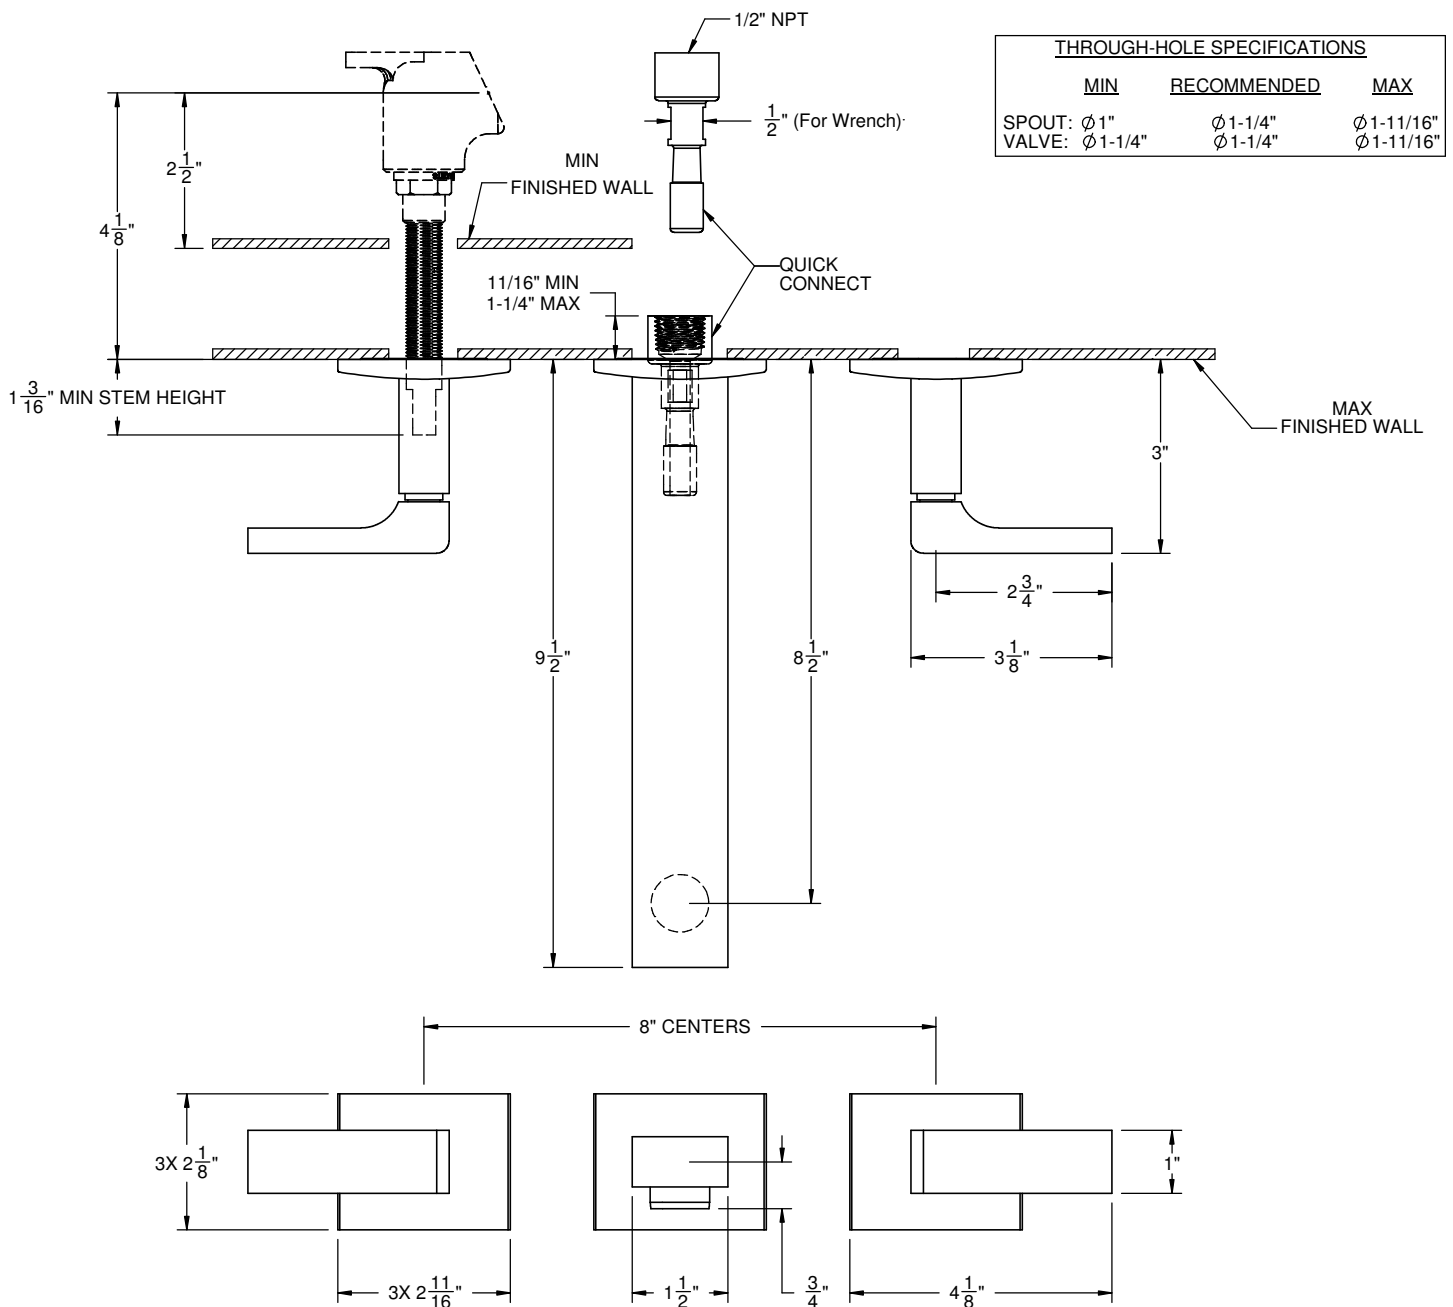

ALL DIMENSIONS SHOWN TO NEAREST 1/16"