

<u>RINCON BAY</u>™

DELUXE WALL TUB SPOUT


Features

- 8-1/2" wall to center Max flow rate: 16 gpm (60.6 L/min) For use with StyleTherm, 3-VR or 2-VR valves

- Solid brass construction Over 30 finishes including 15 PVD finishes

Codes/Standards Applicable

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1

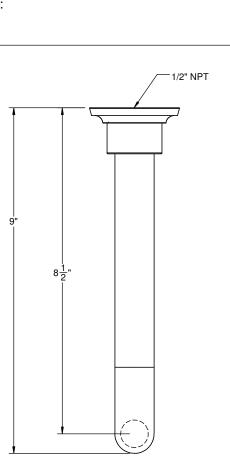

THRC	THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX	
Ø1"	Ø1-1/4"	Ø1-9/16"	

D-45

