



California Faucets®


BEL CANTO™

DELUXE WALL TUB SPOUT

Features



- 7-13/16" spout wall to center
- Max flow rate: 10.0 gpm (37.8 L/min)
- Quick connect
- For use with StyleTherm, 3-VR or 2-VR valves
- Solid brass construction
- Over 30 finishes including 15 PVD finishes

D-E3-77

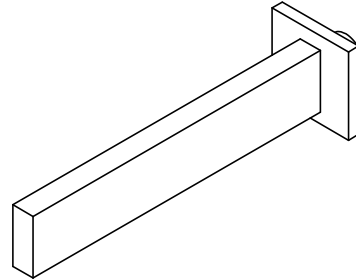

Codes/Standards Applicable

- Meets or exceeds the following at date of manufacture:
- ASME A112.18.1/CSA B125.1

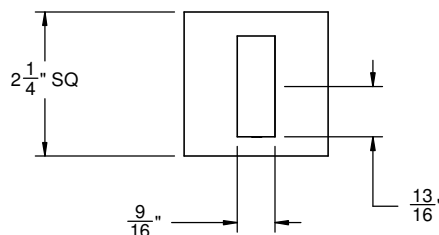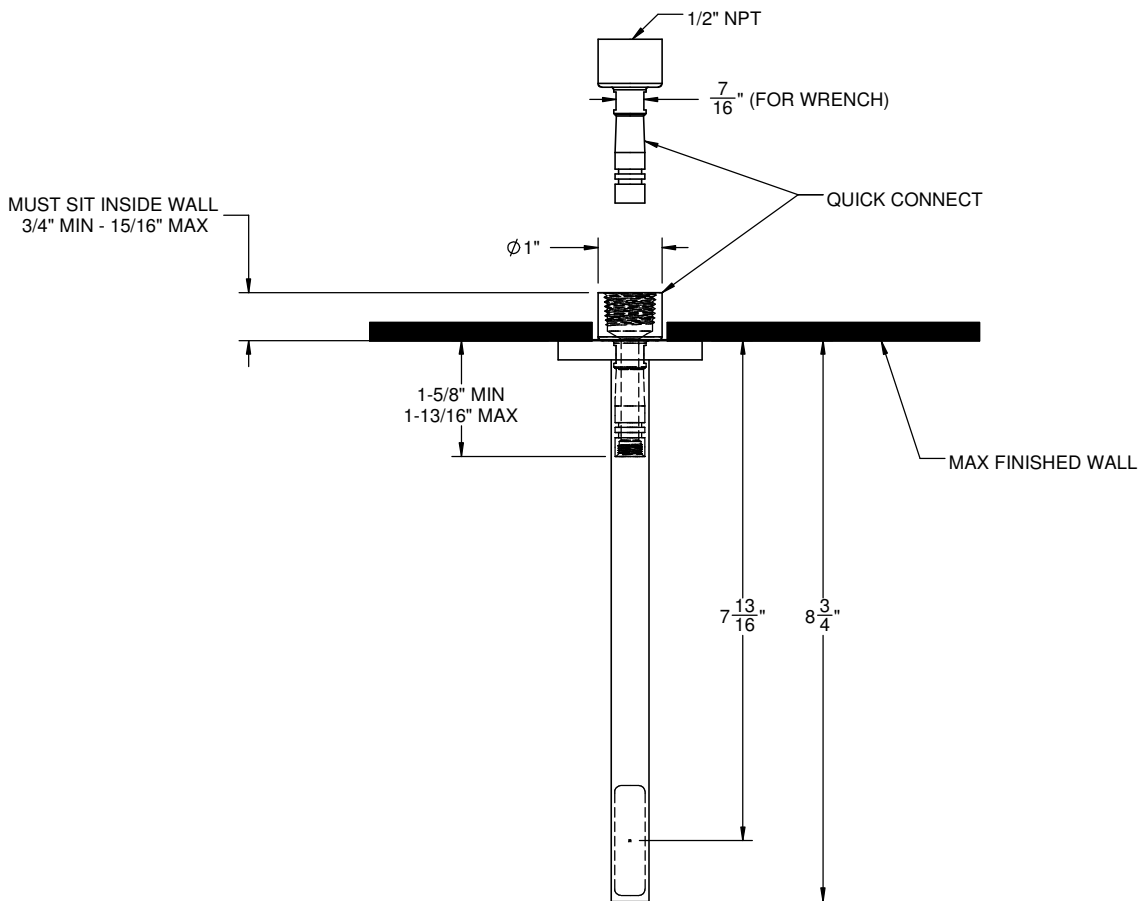

THROUGH-HOLE SPECIFICATIONS

	MIN	RECOMMENDED
SPOUT:	Ø1-1/4"	Ø1-3/8"