





Features

- 25+ artisan finishes including 12 PVD finishes
- All brass construction
- 16gpm (60.6 L/min) max flow rate
- Comes as complete set with trim and valves

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ADA compliant
- Installation of upstream tempering device may be required (verify local codes)

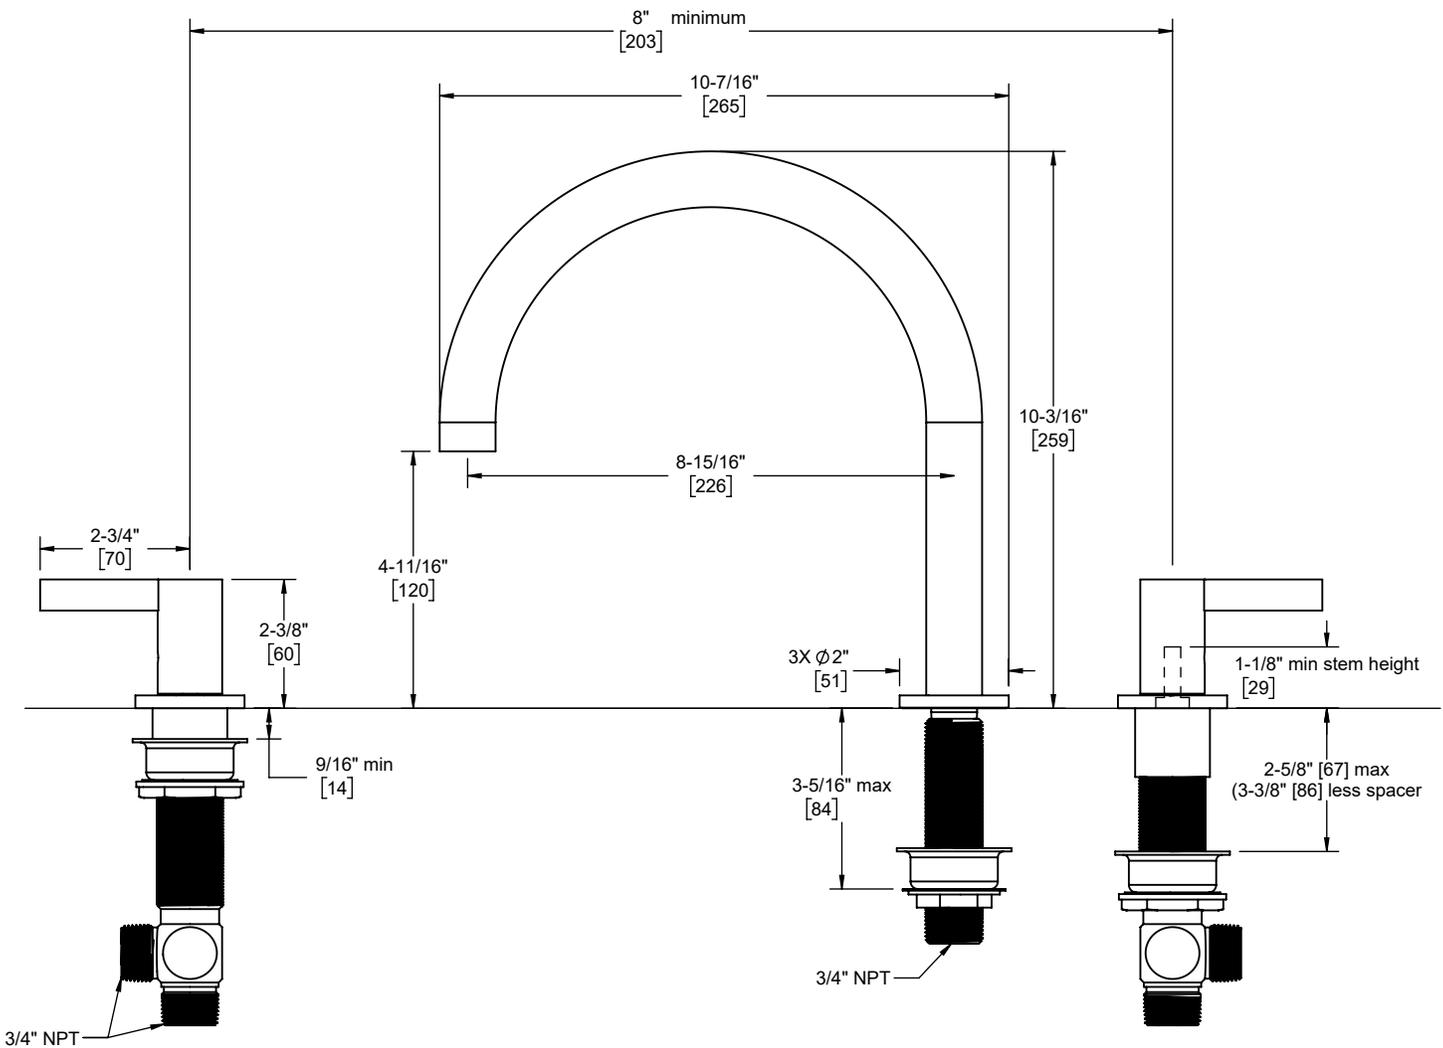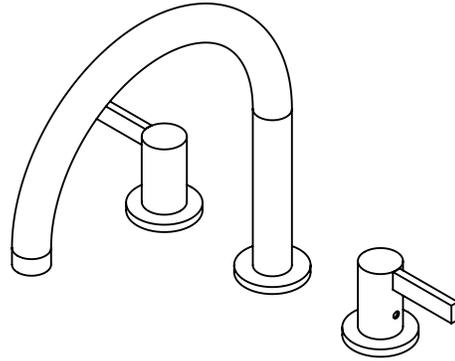

Through-Hole Specifications			
	Min	Recommended	Max
Spout:	Ø1-1/16" [27]	Ø1-3/8" [35]	Ø1-1/2" [38]
Valve:	Ø1-3/8" [35]	Ø1-1/2" [38]	Ø1-1/2" [38]

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]