

<u>StyleFlow™ GEO</u>

3-3/4" MULTI-FUNCTION TRANSITIONAL

HS-413.25

HS-413.20

HS-413.18

Features


- 1/2" MIP inlet
- Swiss shower technology™
- 3 functions: rain, hard rain, & booster massage
- Self-cleaning rubber jets


- ABS body 3-3/4" diameter, gray face Replace FR. with desired max flow rate: HS-413.25 for 2.5 gpm HS-413.18 for 1.8 gpm doc/Standardo

Codes/Standards

Product meets or exceeds the following: • ASME A112.18.1/CSA B125.1

- CEC (1.8 gpm) DOE (2.5, 2.0, & 1.8 gpm) Commonwealth of MA
- EPA WaterSense (2.0 gpm)

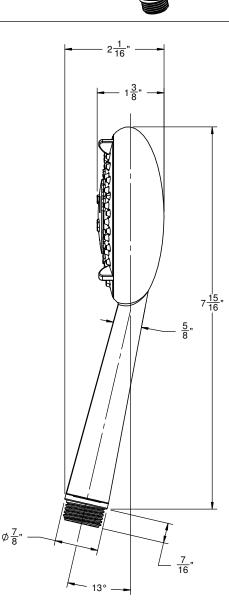

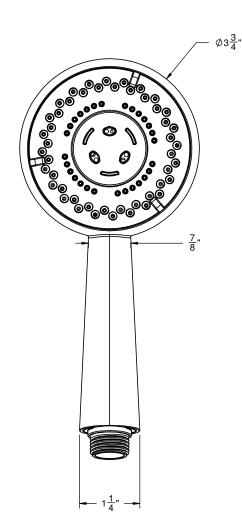

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE