


Features

- Over 30 finishes including 15 PVD finishes


- Solid brass construction
 Max flow rate: 16 gpm (60.6 L/min)
 Requires Rough Valve (08-75-99) sold separately




TO-3408



Codes/Standards Applicable
Meets or exceeds the following at date of manufacture:
• ASME A112.18.2-2011/CSA B125.2-11

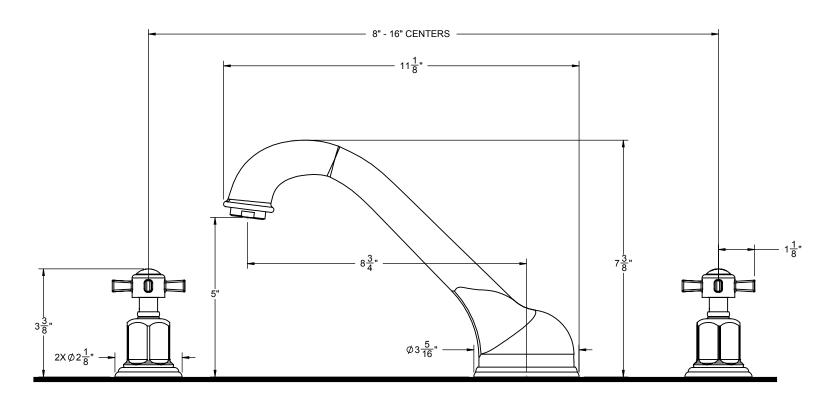



THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMENDED	MAX
SPOUT: Ø1-1/4' VALVE: Ø1-1/2"	'	Ø 1-1/2" Ø 1-3/4"