




Features

- Less head, arm, flange, and spout Requires rough-in (3-VR) sold separately Solid brass construction

- Over 30 finishes including 15 PVD finishes

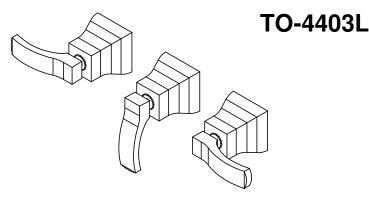



Codes/Standards

- Product meets or exceeds the following:
- ASME A112.18.1/CSA B125.1
- ADA compliant



RECOMMENDED MIN VALVE: Ø11/16" 1-1/4"

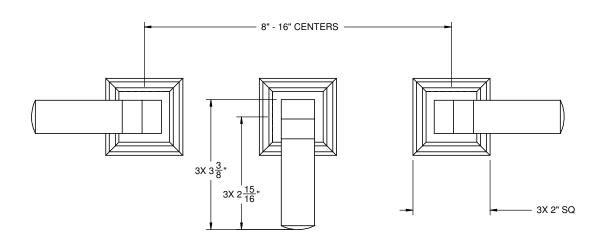

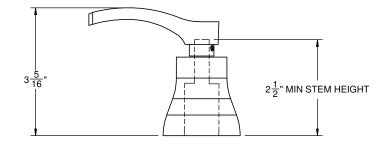

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE