


Model# 80047-ULE60-AD1

Two Handle Wallmount Pre-Rinse Faucet

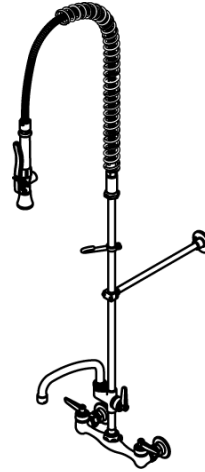

FEATURES & SPECIFICATIONS

- 2-3/8" Lever Handle
- 24" Quick Install Riser With Spring Guide
- 44" Flexible Stainless Steel Hose
- Ceramic Disc Cartridges
- Back Flow Preventers
- 1/2-14 NPS Female Thread 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve
- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve
- 2-Hole 7-7/8" to 8-1/8" Installation
- Pipe Strap and Hook Assembly
- Secondary Control Valve
- Add-On Faucet
- 8" Swivel Tube Spout

FINISHES

- PC Polished Chrome

STANDARDS

- ASME A112.18.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED
- ANSI A117.1 / ADA COMPLIANT
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT



FLOW

- 1.1 GPM Flow Rate, 6.5 ozf Spray Force Spray Valve

WARRANTY

- Lifetime Limited Warranty
- Lifetime Residential Warranty
- 5 Year Commercial Warranty


Job Name _____ Date _____
Model Specified _____ QTY _____
Customer/Wholesaler _____
Contractor _____
Architect/Engineer _____
Submitted as Shown _____
Submitted w/ Variations _____

80047-ULE60-AD1/REV. 11 2016

Product Specifications subject to change without notice

Model# 80047-ULE60-AD1

Two Handle Wallmount Pre-Rinse Faucet

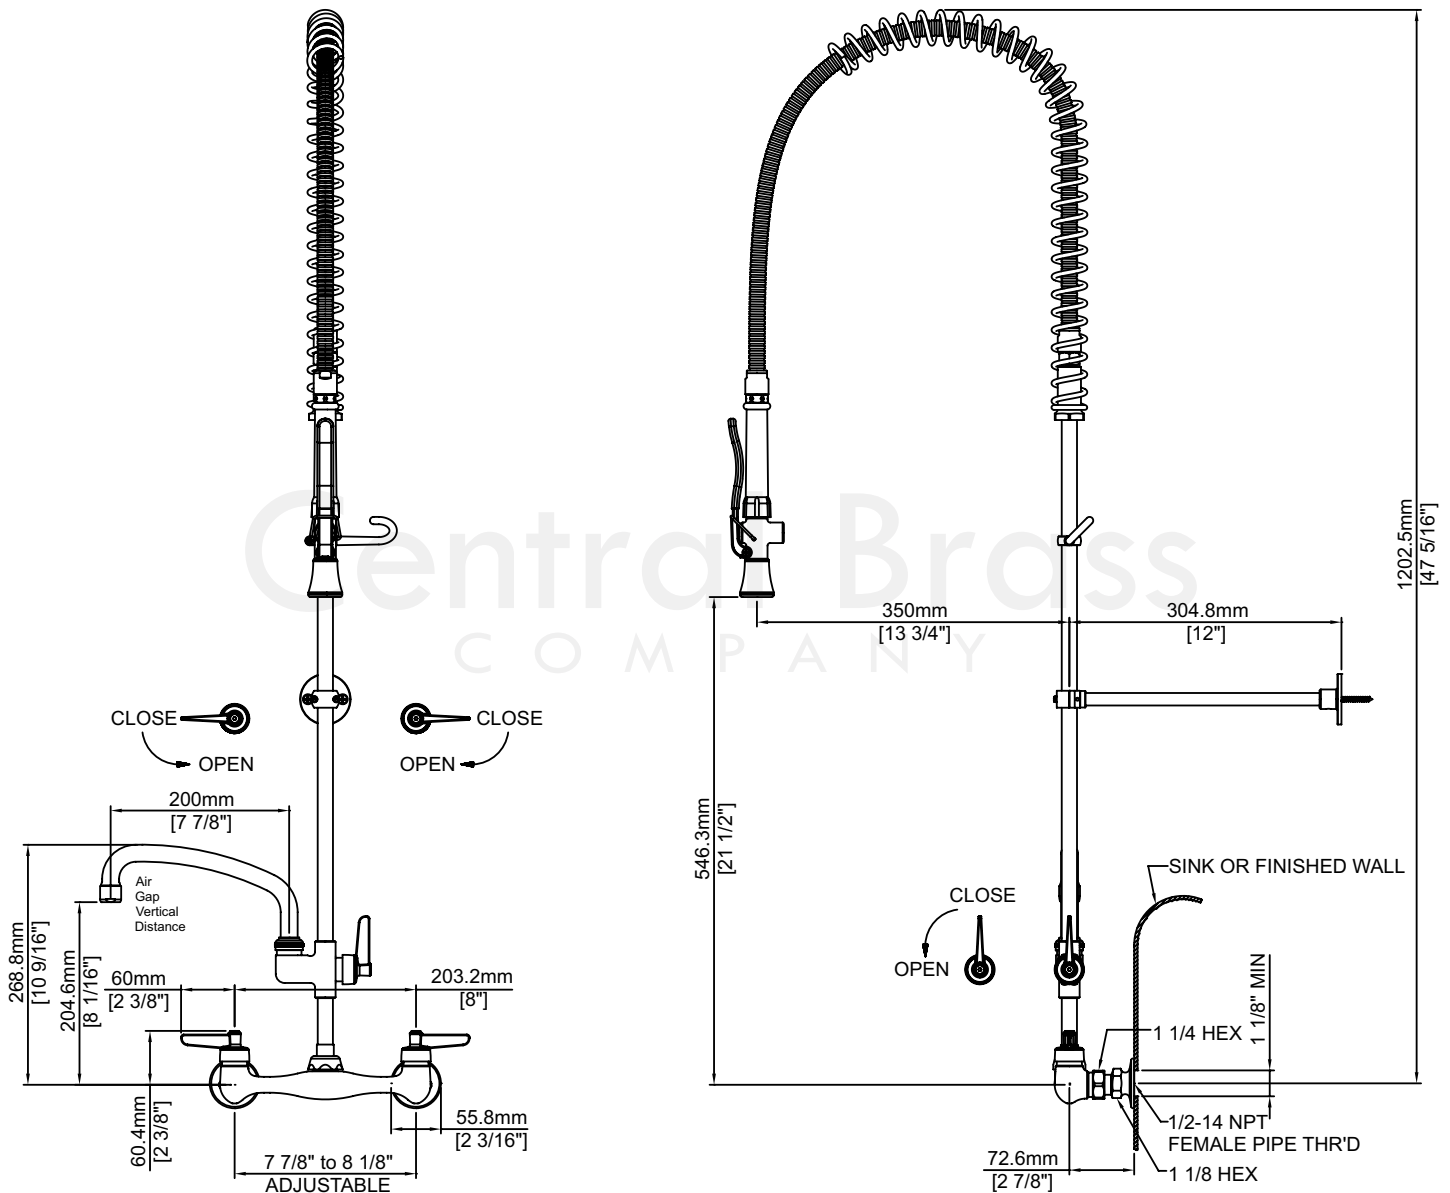

80047-ULE60-AD1/REV. 11 2016

Product Specifications subject to change without notice