


BELGRAVIA 3000 THERMOSTATIC VALVE TRIM WITH INTEGRATED VOLUME CONTROL AND VOLUME CONTROL/TWO-WAY DIVERTER AND CROSS HANDLES

Unlacquered Brass (12-week leadtime)

US-BL3000RB

FEATURES

- Exceptionally crafted, Belgravia lends an historic pedigree to traditional design
- Integrated volume control and volume control/diverter for 3 water outlets
- Required rough features Vernet thermostatic cartridge
- The thermostatic valve senses and controls the actual water temperature and blends hot water with cold water to ensure constant, safe temperatures, preventing scalding.
- Required rough (sold separately): US-WLBP3000R

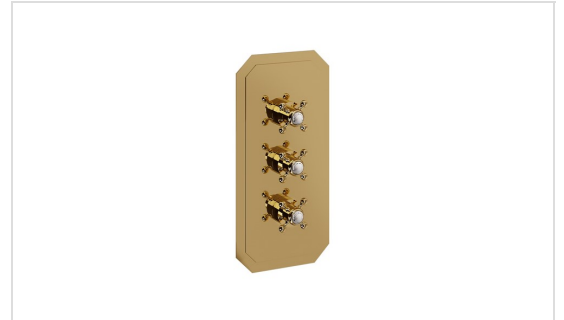

SPECIFICATIONS

Number of water outlets	3
Handle style	Cross
Flow rate	12 GPM
Inlet connection size	3/4" NPT
Outlet connection size	3/4" NPT
Water pressure minimum	20 PSI
Water pressure maximum	Operating pressure of 60 PSI and static pressure of 144 PSI
Installation type	Concealed
Extension kit	EK2000

✓ Limited lifetime. Commercial

Belgravia 2000/3000 Thermostatic Valve Trim

US-BL2000

US-BL3000

