

Vandal resistant front mounting 30° wall mount showerhead 2.0 gpm (7.57 L/min)

SPECIFICATION:

- Cast brass institutional wall mounted shower head
- Polished chrome plated finish
- Concealed cast brass mounting plate
- Vandal resistant front mounting screws
- 1/2" copper sweat inlet
- $_{ullet}$ 30° spray angle from wall
- Shower MAX Flow: 2.0 gpm @ 80 psi (7.57 L/min @ 552 kPa)
- Shower MIN Flow: 1.53 gpm @ 45 psi (5.79 L/min @ 310 kPa)
- Chrome Finish

OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 21, 2021.



EPA WaterSense®

CSA certified

.

Model No: 060793A

COMPLIES WITH:


• ASME A112.18.1/CSA B125.1

or less than the Shower MIN Flow Rate value. *

** NOTE: This model is for use with automatic compensating valves rated at

• (Contact Delta Representative for State and/or Local Approvals)



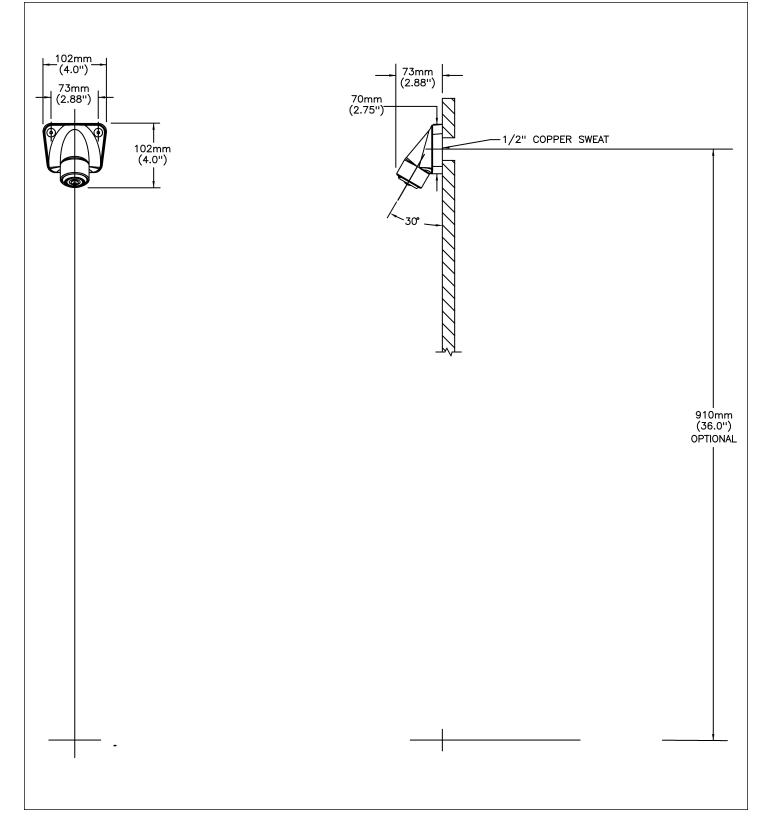

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 21, 2021.