

HARDWIRE CONVERTER WITH BATTERY BACKUP

**Hardwire Converter with Battery Backup
for Delta 6.4 VDC products listed below:**

FOR USE ON ELECTRONIC FAUCETS


590T, 591T, 590TP, 591TP, 600T, 620TP, 630TP, 860T, 1500T3, 1500T4,
3000TA, 590-HDF, 591-HDF 590-P, 591-P, 592-P-HDF SERIES

FOR USE ON ELECTRONIC VALVES

81T with Body Mounted Sensor
81T-WMS with Wall Mounted Sensor
1600T

061047A

To convert installed product in field,
order the 061047A kit pictured below.
Transformer required – order separately.

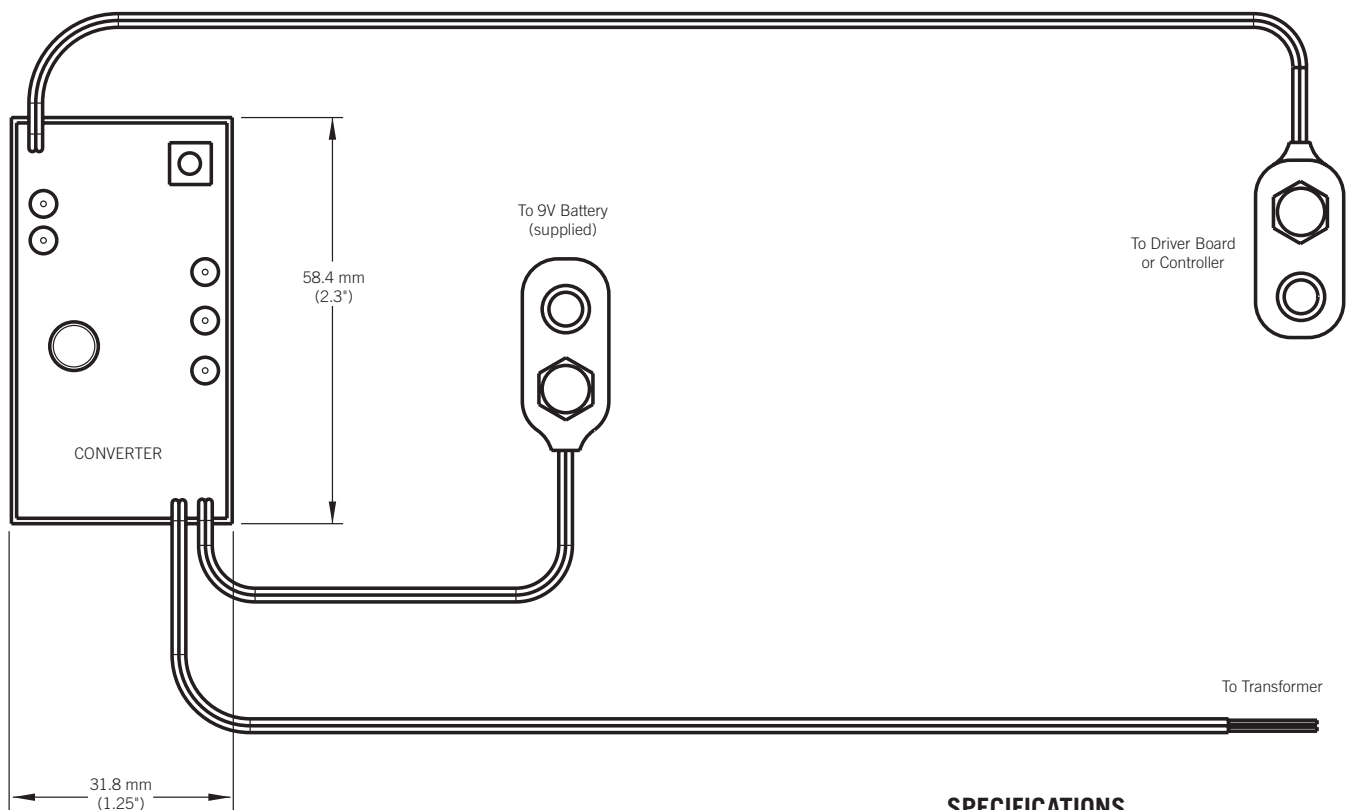

SPECIFICATIONS

Input voltage: 12 - 24 V (AC or DC)
Output voltage: 5 VDC \pm 5%
Current Draw: 600 MA
Operating Temperature Range: -55°C to 85°C
Battery Backup: with 9V Battery

Note: Measurements may vary \pm 6mm (0.25")

Refer to www.specselect.com for individual models.