

Surgeon Scrub-Up

Pedal Valve

Model No: 54T5327A

COMPLIES WITH:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- For commercial use only.
- Foot Pedal Control No. 3 Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations
- Outlet options 2, 3, 4 and 7 are EPA WaterSense listed
- (Contact Delta Representative for State and/or Local Approvals)





SPECIFICATION:

- Foot Pedal Mixing Valve
- Spout: R2 Gooseneck spout-4.5" spout reach -Standard rigid/swivel field installation-Vandal resistant .090" wall thickness(R2)
- Outlet#: 7 Smooth Spout End with Laminar Flow Control in Spout Base -1.0 GPM (3.8L/min)
- Wallmount brass turret
- With vandal resistant locking lugs,
- 3/8" IPS shank, and locknut
- Forged brass wallmount self close foot pedal valve
- Two aluminum indexed pedals
- Polished chrome plated finish
- With inlet stops
- With outlet volume control stop
- Set screw wall flanges

OPERATION:


Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 13, 2021.

Model No: 54T5327A



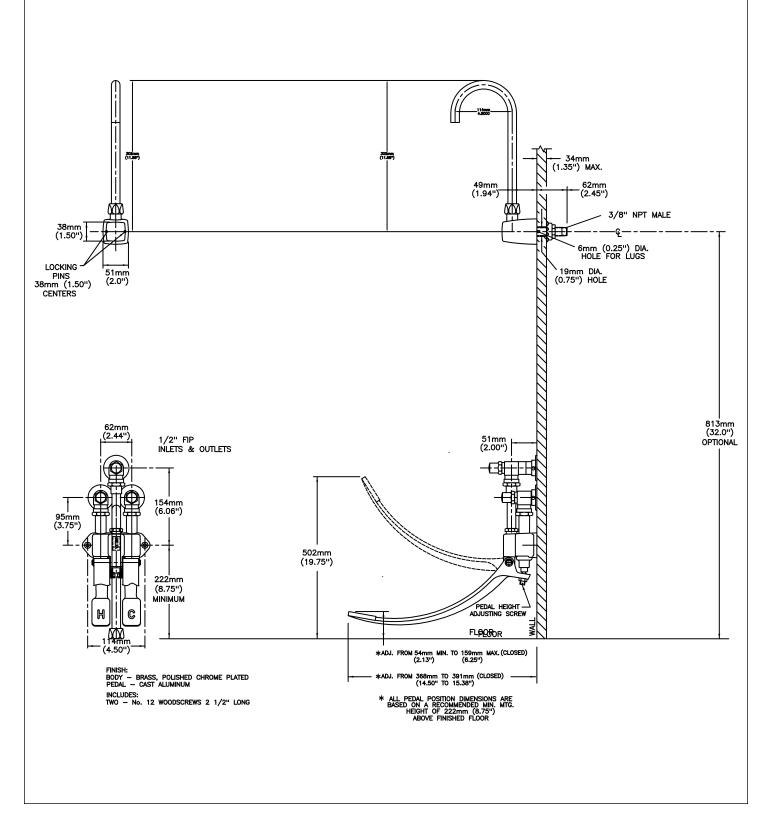

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 13, 2021.