

Electronic Faucets

Electronic Control Box for E-Lav Faucets - Rough-In ONLY with Thermostatic Mix Valve

Model No: ELAVT0008ARI

COMPLIES WITH:

- CSA certified to CSA B125.3 and NSF372
- Complies to ASSE 1069, ASSE 1070/ASME A112.1070/CSA B125.70 and NSF61 Section 9
- Verified compliant with 0.25% weighted average Pb content regulations
- (Contact Delta Representative for State and/or Local Approvals)



SPECIFICATION:


- Control Box Rough-In
- For recessed wall mounting
- 10" square metal box with cover
- Factory assembled waterway components with stops
- Control Box Rough-In
- For recessed wall mounting
- 10" square metal box with cover
- Hot and Cold inlet supplies
- Point of use thermostatic mixing valve
- Integral check valves in hot and cold inlets to prevent crossflow
- Outlet temperature range 95-120°F (35-49°C)
- Maximum flow 11 gpm (42 L/min) @ 45 psi pressure loss, minimum flow 0.34 gpm (1.36 L/min)
- Factory assembled waterway components with stops

OPERATION:

NOTE: High Temperature disinfection cycles not recommended for #8
 Control Box as the thermostatic mixing valve limits the higher temperature water flow output..

(Dimensional drawing on following page)



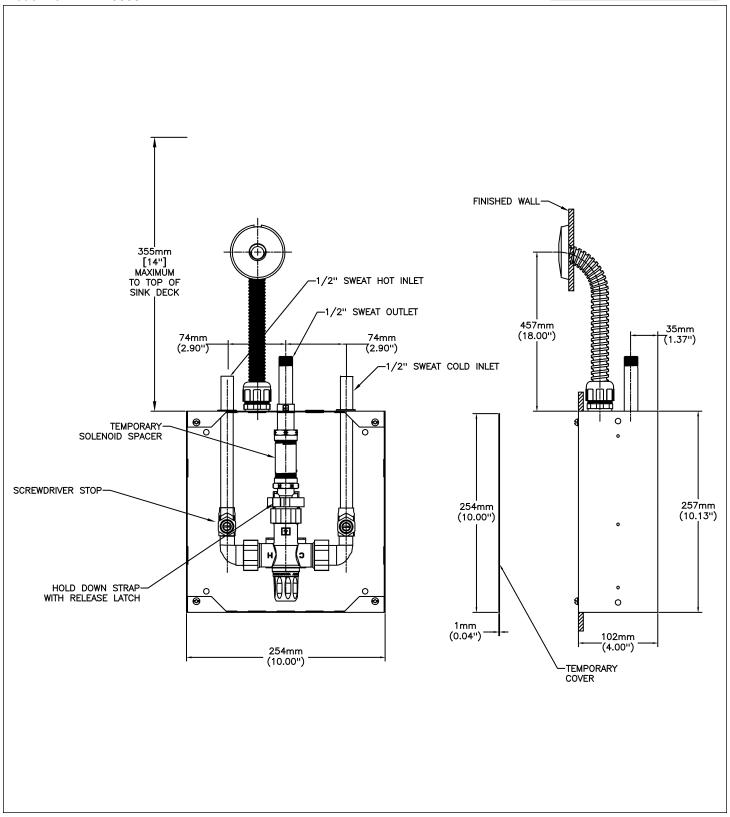

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.