

Submitted Model No.: _____
 Specific Features: _____



WALL BAR HAND HELD SHOWERS

- Certified Dual Check Valves
- Decorative Wall Bar

STANDARD SPECIFICATIONS:

- 60" ultra-flex hose: 51551-WHBDS.
- 69" ultra-flex hose: 57011.
- 70" ultra-flex hose: 51521-WH, 51551-WH, 51551-WHB & 51551-WHBUF.
- 60-82" stretchable hose: 51501-WH & 51502-WH.
- ADA compliance applies to the hand shower and hose only: 51551-WH, 51551-WHB, 51551-WHBDS, 51551-WHBUF & 51521-WHB.
- Certified dual check valves for backflow protection.
- 2.0 gpm @ 80 psi, 7.6 L/min @ 552 kPa
- 2.5 gpm @ 80 psi, 9.5 L/min @ 552 kPa
- Handheld shower with two spray settings - not a positive shut-off (51501-WHB, 57011, 51521-WHB, 51551-WHB, 51551-WHBDS, 51551-WHBUF).
- Handheld shower with single spray settings - not a positive shut-off (51501-WH, 51502-WH, 51521-WH, 51551-WH).


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1/CSA B125.1 ◆
- EPA WaterSense®

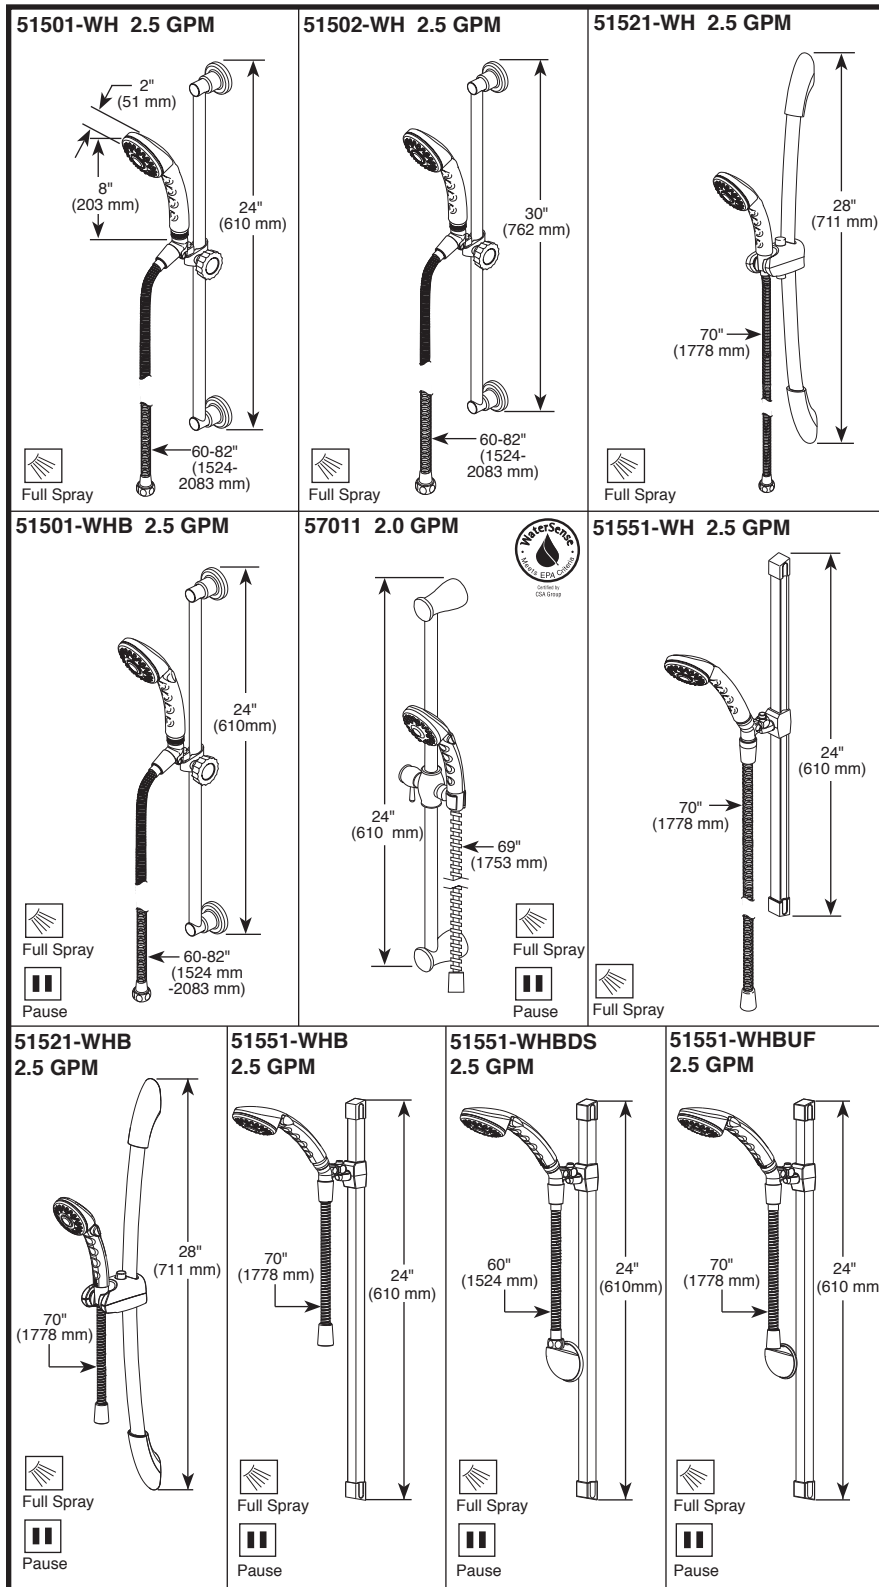

◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-51501-WH Rev. H



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
 © 2017 Masco Corporation of Indiana