


Single and Mixing Bedpan Cleansers

TECK®

DELTA
COMMERCIAL

Specification: (example)

- Cast brass, **volume control valve**
- Integral stop, polished chrome plated finish
- Tuf-Teck institutional structure
- Color indexed, 70mm (2-3/4") ADA compliant lever blade handle
- Vandal resistant handle screw, rigid wall spout, spray bedpan outlet, insulated bent tube and handle
- 1500mm (59") reinforced hose and hanger, with stop
- and ... with ... (add control required)
- with ... (add spout required)
- with ... quick disconnect (add suffix **QD** if required - See Back Page)



Specification: (example)

- Wallhung, forged brass
- **Self close foot pedal valve**, aluminum pedal, integral inlet/outlet stops, polished chrome plated finish
- Rigid wall spout, spray bedpan outlet, insulated bent tube and handle
- 1500mm (59") reinforced hose and hanger, with stop
- and ... with ... single or double valve, (as required)
- with ... (add spout required)

Engineer/Architect Approval


Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.			
Volume Control Valves	54TI	1 & 2		4
Foot Pedal Valves Only	54TI	3 & 4		4
				A



CONTROL		SPOUT		OUTLET	
0	☐	0	☐	0	☐
1	Wallmounted Valve, Double-check Vacuum Breaker  	1	☐	1	☐
2	In-wall Valve with Integral Stop  	2	☐	2	☐
3	Single Wallmount Valve  	3	Wallmounted Vacuum Breaker & Spout 	3	☐
4	Double Wallmount Valve  	4	☐	4	With Self-close Stop  ☒
5	☐	5	Double-check Vacuum Breaker Spout 	5	☐
6	☐	6	Pressure Vacuum Breaker and Spout 	6	☐
7	☐	7	☐	7	☐
8	☐	8	☐	8	☐
9	☐	9	☐	9	☐

No. 6 Vacuum Breaker recommended for High Hazard Cross Connections and Continuous Pressure.

Check with **Local Code Authorities** for proper cross flow protection requirements.

Refer to www.specselectonline.com for individual models.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselectonline.com for finish options and product availability.

Note: Use this page front and back as a product submittal sheet.

Approvals:


- CSA certified
- Complies to ASME A112.18.1
- ADA Compliant and meets Handicapped Accessibility  Standard ASME A117.1 of less than 5 lbs. operating force.

Vacuum Breakers/Spouts:

- Spout No. 3 VB certified under ASSE 1001 and CSA Standard B64.1.1
- Spout No. 5 VB certified under ASSE 1035 and CSA Standard B64.8
- Spout No. 6 VB certified under ASSE 1020 and CSA Standard B64.1.2
- IAPMO listed

(Contact Delta Representative for State and/or Local Approvals.)

FLOWRATE vs PRESSURE

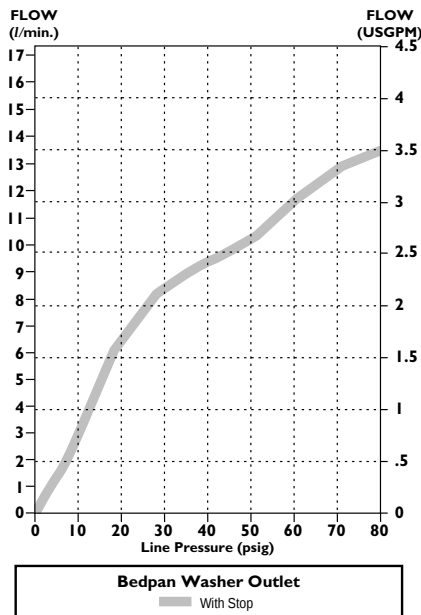


Note: For Control Option No. 3 & 4 it is strongly recommended that each supply line be equipped with a hammer arrestor installed per manufacturer's instructions.

060327A


1/2" NPT Water Hammer Arrestor

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")


NO. 1 CONTROL

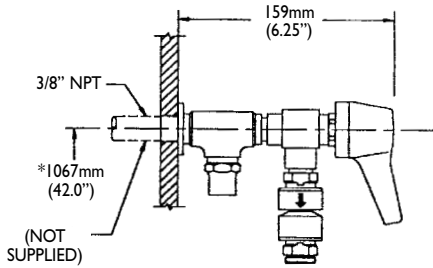


NO. 2 CONTROL

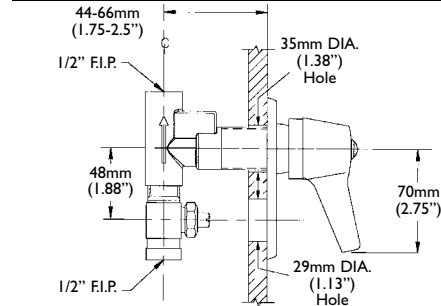


NO. 3 and NO. 4 CONTROLS

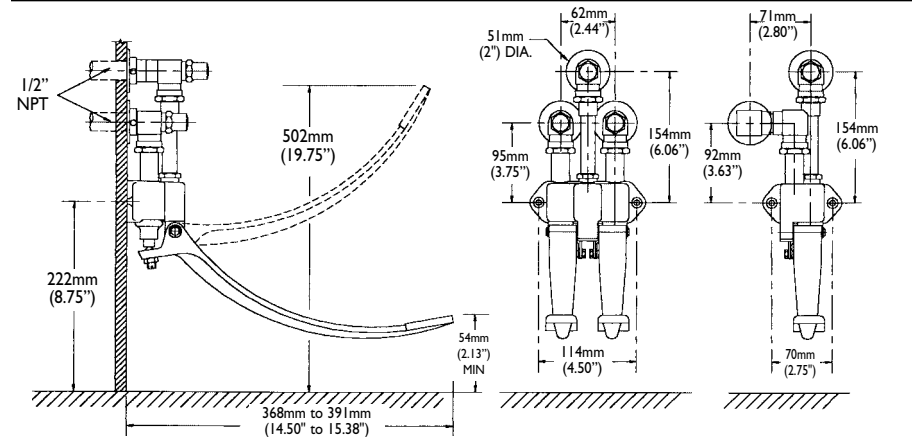

NO. 5 SPOUT



NO. 3 and NO. 6 SPOUTS

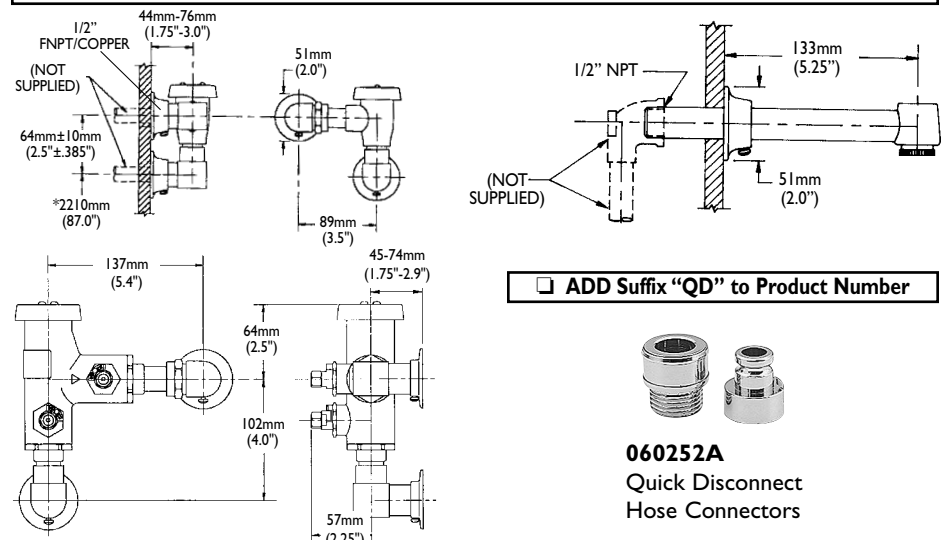

☐ ADD Suffix "QD" to Product Number



060252A
Quick Disconnect
Hose Connectors

*Suggested - Check local building code requirements on backflow protection and all installation heights.