



Submitted Model No.:

Specific Features:

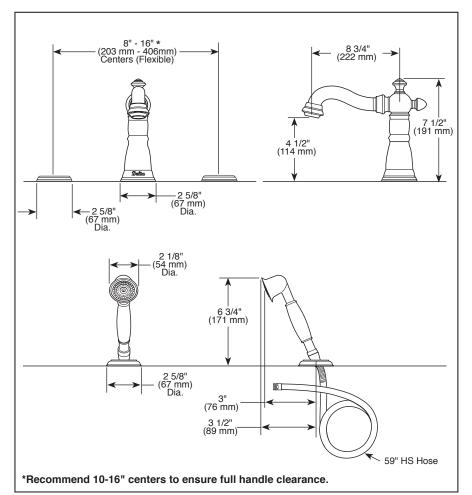

▲ Designate Proper Finish Suffix

Available LHP Handle Options



Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability. DSP-B-T2755-LHP Rev. F



see what Delta can do

ROMAN **TUB/WHIRLPOOL** FAUCET TRIM

- Victorian[®] Collection
- Two Handle Roman Tub Faucet
- Three Hole Installation (T2755 Series)
- Four Hole Installation (T4755 Series)

STANDARD SPECIFICATIONS:

- Hand shower max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Trim Only for two handle Roman Tub faucet for concealed mounting
- LHP-Less Handle Program. See handle options below
- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation -R4707 for four hole
- -R2700 or R2707 for three hole
- -RP23601 for three hole 10" fixed installation
- There are separate specification sheets on each rough-in kit if more details are required
- Hand shower includes double check valves for backflow prevention

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1 - Valve control only
EPA WaterSense[®] - Applies to T4755-ALHP only

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2019 Delta Faucet Company