


**SensoWash® Slim SensoWash® Slim shower toilet seat for DuraStyle\* # 611200001001300 / 611200002000300 / 611200002100300 / 611200002304300**

| < 375 mm > |

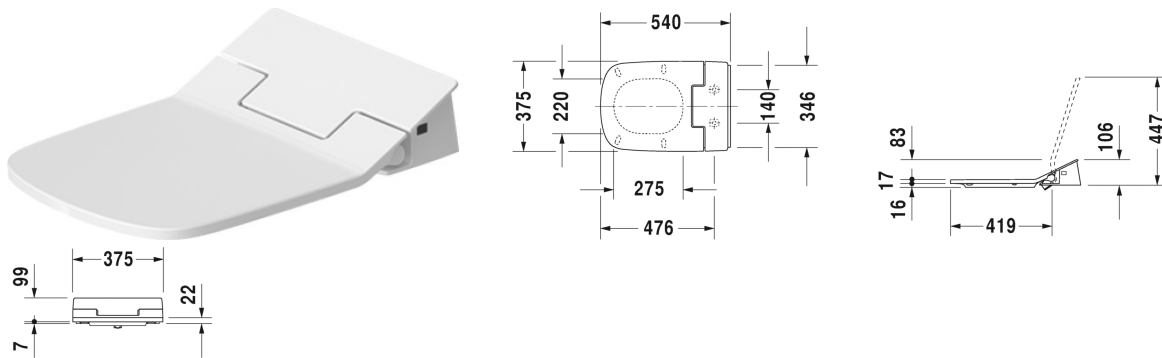

SensoWash® Slim shower toilet seat for DuraStyle*	Dimension	Weight	Order number
Rear-, Lady- and Comfortwash, with soft closure, Night light, Remote control included, Locking function via remote control, Self-cleaning spray wand, on / off-button, with concealed connections, Automatic drainage in periods of prologed disuse			
<b>Colors</b>			
00 White Alpin			
<b>Variant</b>			
100-120V 50/60Hz, **, Individual adjustment of water temperature as well as spray wand position and water spray intensity, Seat and lid easy removable one-handed	375 x 540 mm	5.500 kilogram	611200001001300
220-240V 50/60Hz, **, Individual adjustment of water temperature as well as spray wand position and water spray intensity, Seat and lid easy removable one-handed	375 x 540 mm	5.500 kilogram	611200002000300
220-240V 50/60Hz, **, Seat heating, individual adjustment of water- and seat temperature as well as spray wand position and water spray intensity	375 x 540 mm	5.500 kilogram	611200002100300
220-240V 50/60Hz, Protection device according EN 1717 integrated, Descaling function and taps inclusive, Individual adjustment of water temperature as well as spray wand position and water spray intensity, Seat and lid easy removable one-handed	375 x 540 mm	5.500 kilogram	611200002304300
<b>Infobox</b>			
Further details see <a href="http://www.duravit.com/sensowash">www.duravit.com/sensowash</a> , Install a water softener with water hardness $\geq 2.4$ mmol/l ( $\geq 14^\circ$ dH or $24^\circ$ fH)., Install a water water softener with water hardness $\geq 2.4$ mmol/l ( $\geq 14^\circ$ dH and/or $24^\circ$ fH)			
<b>Suitable products</b>			

**SensoWash® Slim SensoWash® Slim shower toilet seat for DuraStyle\* # 611200001001300 / 611200002000300 / 611200002100300 / 611200002304300**

|< 375 mm >|

One-piece toilet for SensoWash® US-version, only in combination with SensoWash, elongated with syphonic jet action, 305 mm/12" rough-in, 305 mm (12") rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC® listed*, 370 x 720 mm	370 x 720 mm	215751
Toilet wall mounted for SensoWash® washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, UWL class 1, cUPC® listed*, 370 x 620 mm	370 x 620 mm	253759
Toilet close-coupled for SensoWash® (without cistern), only in combination with SensoWash, washdown model, Outlet for Vario connector set, for horizontal and vertical outlet, length adjustable from 70 - 190 mm, and vario connecting bend, vertical outlet from 170 - 220 mm, connecting elements for SensoWash with concealed connections included, fixings included, cUPC® listed*, UWL class 1, 370 x 700 mm	370 x 700 mm	215659
Two-piece toilet for SensoWash® (without cistern), US-version, elongated with syphonic jet action, only in combination with SensoWash, 305 mm/12" rough-in, 305 mm (12") rough-in, connecting elements for SensoWash with concealed connections included, vertical outlet, cUPC® listed*, 385 x 700 mm	385 x 700 mm	216051
Toilet wall mounted Duravit Rimless for SensoWash® rimless, washdown model, only in combination with SensoWash, connecting elements for SensoWash with concealed connections included, Durafix included, cUPC® listed*, UWL class 1, 370 x 620 mm	370 x 620 mm	254259

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*