


**C.1 Floorstanding tub filler # C15250000U10**

|&lt; 35 7/8" Inch &gt;|

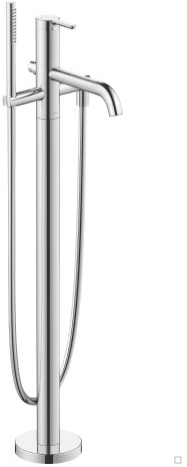

Floorstanding tub filler	Dimension	Weight	Order number
connection type: rough-in for concealed installation, projection 7 7/8", with diverter valve, integrated hand shower holder, check valve in hose connection, recommended operating pressure 43.5 - 72.5 psi, width 8 1/4", includes: shower hose and hand shower, 35 7/8" Inch			
<b>Colors</b>			
10 Chrome			
<b>Variant</b>			
Chrome finish, 5.1 gal/min (19.2 l/min) spout flow rate 43.5 psi (3.0 bar), 1.8 gal/min (6.7 l/min) hand shower flow rate 43.5 psi (3.0 bar), rough-in not included, cUPC® listed*			C15250000U10
<b>Required accessories</b>			
Rough-in floorstanding tub filler for mounting onto bathroom floor			GK5900003

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in inch & mm and are non-binding. Exact measurements, in particular for customized installation scenarios, can only be taken from the finished ceramic piece.*

C.1 Floorstanding tub filler # C15250000U10

| < 35 7/8" Inch > |

