


Happy D.2 Plus Mirror with lighting # HP7480 G/S

|< 700 mm >|

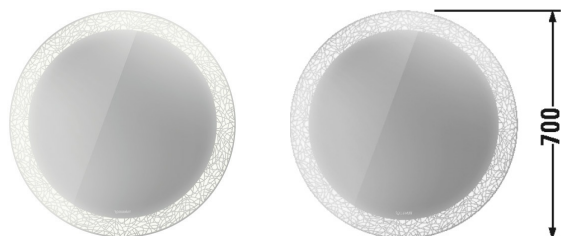

Mirror with lighting	Dimension	Weight	Order number
"sensor" - version, IP 44, cEGS/IAPMO®, LED light field (circular), Light field pattern choosable, LED dimming function, 1 sensor switch centric at the bottom, Mirrors require a GFCI 110 V 60 Hz power source. Flat plug will be supplied with mirror., LED (lifespan > 30.000 hours), LED module fixed install, Energy class: A+, LED module 3500 Kelvin light colour, 31 W			
Colors			
Variant			
	700 x 47 mm		HP7480 G/S
Infobox			
# HP 7480 and HP 7481 are available from stock, Stock item without additional modules, * Complies with following standards: UL 962 and CSA C22.2 No. 12-1982, Our mirrors and mirror cabinets have to be connected to an uninterruptible power supply, Distance between sensor and reflecting surfaces = minimum 75 mm, Please specify when ordering: - Light field pattern radial (S) / organic (G)			
Accessory			
Additional modules defog system with Auto-Off function			UV9847

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.