



Installation Instructions

Wall Hung Sink Installation

ATTENTION INSTALLER


- 1) JUST MANUFACTURING RECOMMENDS THAT WALL HUNG SINKS SHOULD BE INSTALLED BY A PROFESSIONAL EXPERIENCED INSTALLER.
- 2) JUST MANUFACTURING IS NOT RESPONSIBLE FOR SINK IF DAMAGED DURING INSTALLATION.
- 3) INSPECT SINK FOR DAMAGE PRIOR TO BEGINNING INSTALLATION.
- 4) METAL EDGES MAY BE SHARP — USE CAUTION WHEN HANDLING.
- 5) FOLLOW ALL LOCAL PLUMBING AND BUILDING CODES.
- 6) USE FASTENERS RATED TO 300 LBS. MINIMUM APPROPRIATE FOR THE MATERIAL TO WHICH THE SINK IS MOUNTED.



INSTALLING SINK


Step 1:

Install the wall mounting clip to the wall in the required position per the installer. Hardware not included.

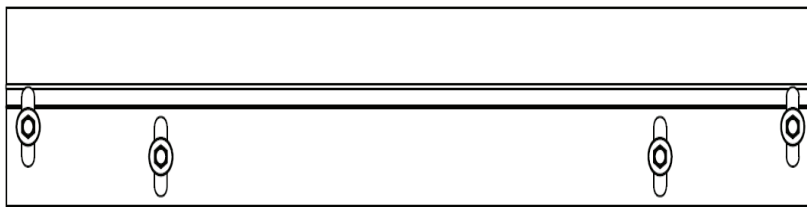


Step 2:

Place the sink into position, making sure the rear rim engages the wall mounting clip.

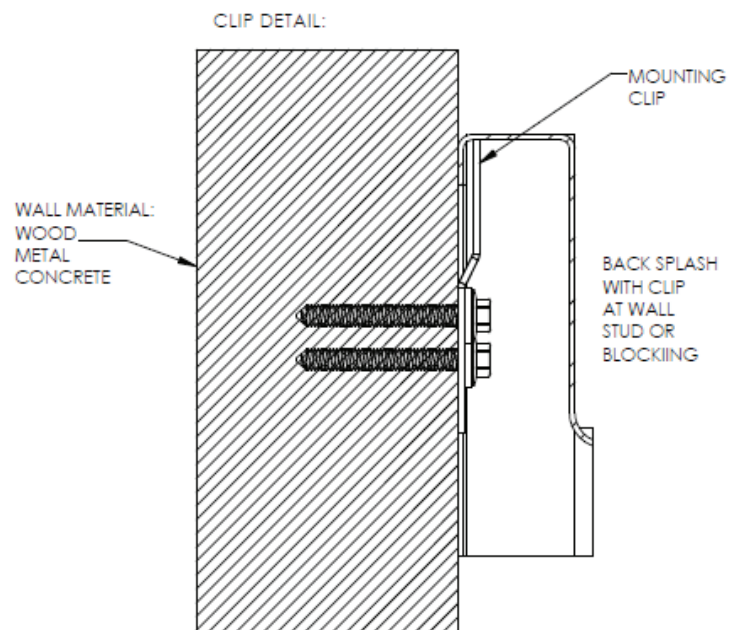

Step 3:

While sink is positioned on the wall mounting clip, mark top and bottom holes on the rear of the sink to locate positioning then remove sink from wall mounting clip. Drill holes for securing sink to wall.

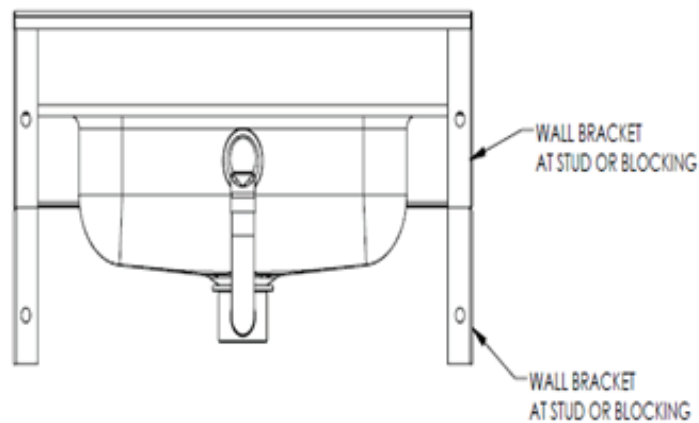

Step 4:

Position sink onto the wall mounting clip and secure to wall through stud or blocking. Hardware not included.

