## Elkay Cooler Wall Mount Non-Filtered Non-Refrigerated Light Gray Granite

**Model EWDALF** 

## PRODUCT SPECIFICATIONS

Elkay Cooler Wall Mount Non-Filtered Non-Refrigerated, Light Gray Granite. Features shall include Glass Filler Prepped. Furnished with Flexi-Guard ® Safety Bubbler. Mechanical Top Bubbler Button activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 1 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

| Special Features:        | Glass Filler Prepped          |
|--------------------------|-------------------------------|
| Finish:                  | Light Gray Granite            |
| Power:                   | No Electrical Required        |
| Bubbler Style:           | Flexi-Guard ® Safety Bubbler  |
| Activation by:           | Mechanical Top Bubbler Button |
| Mounting Type:           | Wall Mount (On Wall)          |
| Chilling Option:         | Non-refrigerated              |
| Dimensions (L x W x H):  | 18" x 14-1/2" x 29-1/2"       |
| Approx. Shipping Weight: | 50 lbs.                       |
| Installation Location:   | Indoor                        |
| No. of Stations Served:  | 1                             |

Special Note: Glass filler ordered separately.

 Mechanically-Activated bubbler continues to supply water in event of service disruptions.



#### AMERICAN PRIDE. A LIFETIME TRADITION.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Included with Product: Water Cooler

### PRODUCT COMPLIANCE

ASME A112.19.3/CSA B45.4

Buy American Act

NSF/ANSI 61 & 372 (lead free)



## Installation Instructions (PDF)

Water Systems are warranted for 12 months from date of installation. Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty. Warranty (PDF)

#### OPTIONAL ACCESSORIES

| 0. 1.01   |
|---|
| EWF172 - WaterSentry VII Filter Kit (Coolers + Fountains) |
| LK1110 - Elkay Glass Filler                               |
| LK1114 - Elkay Glass Filler Chrome 2-1/2" x 10"           |
| 97446C - Accessory - Bubbler Kit Vandal-Resistant         |

| PART:     | QTY: |
|-----------|------|
| PROJECT:  |      |
|           |      |
| DATE:     |      |
| NOTES:    |      |
| APPROVAL: |      |

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

# Elkay Cooler Wall Mount Non-Filtered Non-Refrigerated Light Gray Granite

**Model EWDALF** 

Open space rough-in design permits new installation or replacement of existing fountains and coolers with this Elkay cooler when rough-in is within the outline shown.

#### **IMPORTANT! INSTALLER PLEASE NOTE:**


This water cooler has been designed and built to provide water to the user which has not been altered by materials in the cooler waterways.

#### NOTICE


The water cooler must be connected to the water supply using a dielectric coupling. The cooler is furnished with a non-metallic strainer which meets this requirement. The drain trap which is provided by the installer should also be plastic to completely isolate the cooler from the building plumbing system.


These products are designed to operate on 20 psi to 105 psi supply line pressure.

#### OPERATION OF QUICK CONNECT FITTINGS



Pushing tube in before pulling it out helps to release tube



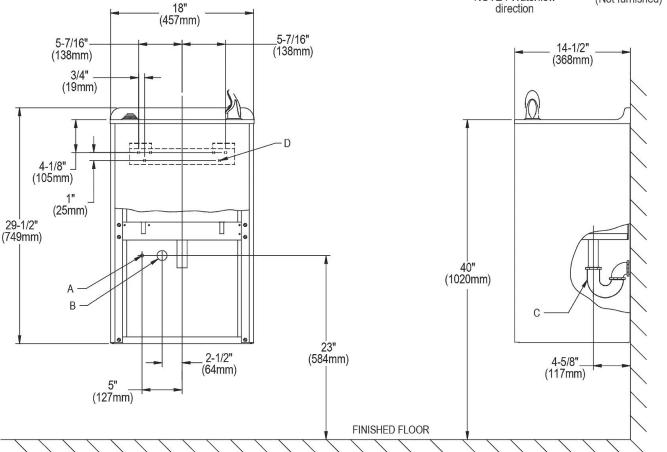

LEGEND A = Recommended water supply location 3/8" O.D. unplated copper tube connect stub out 1-1/2" (38mm) out from wall shut off by others.

B = Recommended location for waste outlet 1-1/4" O.D. drain.

C = 1-1/4" Trap not furnished.
D = 5/16" (8mm) screw holes in mounting plate.

NOTE: New installations must use Ground Fault Circuit Interrupter (GFCI). It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.