

### SAFETY & WARNINGS

**WARNING!**

**Cut Hazard**  
 Failure to use caution could result in injury.  
 • Take care: some edges may be sharp.



- For products that are not front-mounted, installation must be carried out by a Fisher & Paykel trained and supported service technician.
- Ensure all packaging is removed and disposed of responsibly.
- Installation of this product requires basic mechanical skills.
- Ensure product is installed with the correct tools to avoid personal injury or damage to the appliance.
- Take care not to scratch the door with the supplied Hex key when tightening the screws.

### COMPONENTS REQUIRED

#### Supplied



Handle (1)



M6x25mm pan head screw (2)



M6x25mm countersunk screw (2)



5mm hex key (1)

#### Not supplied



Powered driver



Crosshead driver



Tape measure



Level

### FITTING HANDLE TO PANEL

①




**Custom panel installations:**  
 Mark the handle location on the panel. Ensure distance between holes is 432mm.

②



**Custom panel installations:**  
 Drill the holes using a 7mm drill bit. Counterbore from the rear.

③

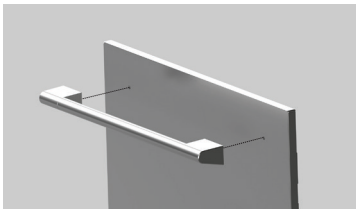

Align handle to the holes.

④



Secure handle by loosely tightening the screws using a crosshead driver. Do not overtighten.

**Custom and Dishwasher panels:**  
 Countersunk screw  
**DishDrawer panels:**  
 Pan head screw

⑤



Use a level to confirm the handle is aligned. Tighten using the supplied hex key.