

8 IN CONCRETE TO 8 IN CLAY



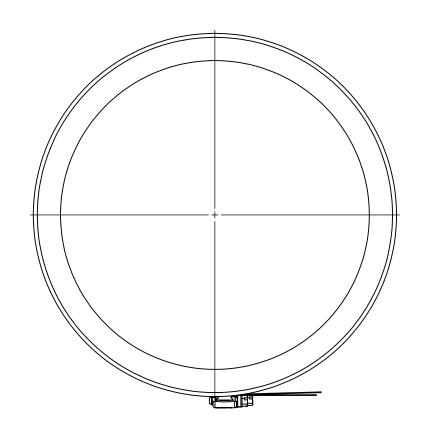

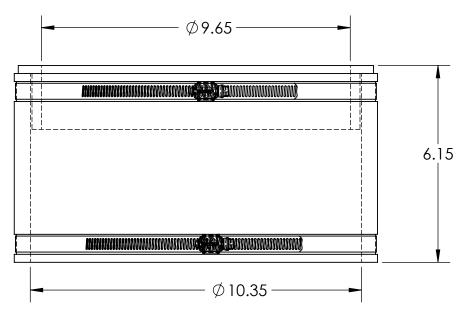

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FERNCO, INC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FERNCO, INC.
IS PROHIBITED.

	IOLERANCES:
	Fractional ± 1/4"
	$.XX = \pm .09$
	ANG.= $\pm 5^{\circ}$
Į	UNLESS OTHERWISE SPECIFIED

:5: /4"	
0	
CIFIED	

Material	FLEXIBLE PVC	CLAMPS USED	300 SERIES STAINLESS	
Conforms to ASTM	D5926	INSTALLATION TORQUE	60IN LBS	INCH
Min∖Max Temp.	-30/140 Degrees F	NOTE 1:	FOR DWV USE ONLY	3RD AN
Pressure Tested	4.3 PSI / GRAVITY FLOW	NOTE 2:		DO NOT

1	SIZE:	
INCHES	A	
D ANGLE PF	ROJECTION	(
NOT SCALI	E DRAWING	

DESIGNER.	T. OISTAD
CHECKER:	DATE:

scale:

DATE:

4/18/2024 SHEET 1 OF 1