

GOOGS504ST / GOOGS507ST / GOOGS507ST TREYSTA®

Tub and Shower Faucet Rough-In Valve Assembly

SPECIFICATIONS



G00GS504ST



Use with trim kits for:

GERBER.

- Includes Forged Valve Body, Plaster Guard and Innovative Pressure Test Cap
- Includes 8" x 7" x 1/2" Type M Copper Tube for Tub Outlet
- Connection Type:
 G00GS504ST: 1/2" Crimp PEX Inlets, 1/2" Crimp PEX Shower Outlet
 G00GS505ST: 1/2" IPS/Sweat Inlets, 1/2" IPS/Sweat Shower Outlet
 G00GS507ST: 1/2" Cold Expansion PEX Inlets, 1/2" Cold Expansion PEX Shower Outlet
- Includes 1/4 Turn Service Stops
- Installed Rough-In Can Be Pressure Tested to 150 psi (Air or Water), Mixed or Isolated Inlets, Using Included Pressure Test Plug
- Accommodates Standard, Back-to-Back, and Thin Wall Installations
- Integrated, Easy-Access Mounting System
- Treysta Cartridge Ships with Trim, Sold Separately






GOOGS504ST Crimp PEX Inlets with Stub Out with Stops
GOOGS505ST IPS/Sweat Inlets with Stub Out with Stops
GOOGS507ST Cold Expansion PEX Inlets with Stub Out with Stops

G00GS507ST

Standards & Certifications



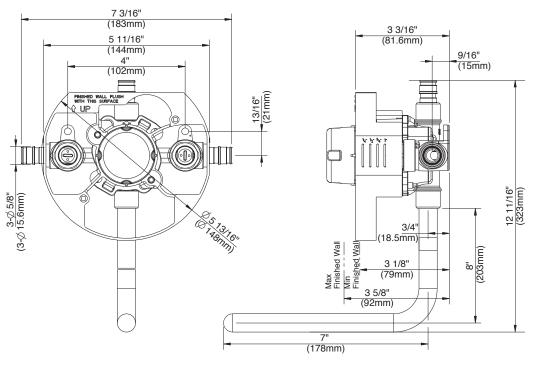

Name:	Contractor:
Location:	Contact #: