

**Features:**

□ **HE-27-740**

- High Efficiency Urinal 0.5GPF, and 1.0GPF (1.9LPF, and 3.8LPF) when used with the appropriate flush valve.
- Elongated Rim (14" for finished wall)
- Washout Flushing Action
- 3/4" Inlet Spud for Exposed Flushometer
- Outlet Connection Threaded 2" Inside (NPTF)
- Minimum Wall Space
- Integral Strainer
- ADA Compliant



HE-27-740 Urinal Shown

**Replacement items sold separately:**

- Outlet (99-160)
- Inlet Spud (99-275)
- Wall hanger (99-161)

**Technical Information:**


Configuration	Wall Mount
Water per flush	0.5GPF, and 1.0GPF (1.9LPF, and 3.8LPF)
Outlet	1 1/2"
S/B Inlet Spud	3/4"
Height	18 1/2"
Width	13 3/8"
Depth	14"
Product Weight	30.4 lbs

**Available Colors:**

- White
- Other: Refer to Price Book for additional colors/finishes

**Warranty:**

- Limited Lifetime Warranty

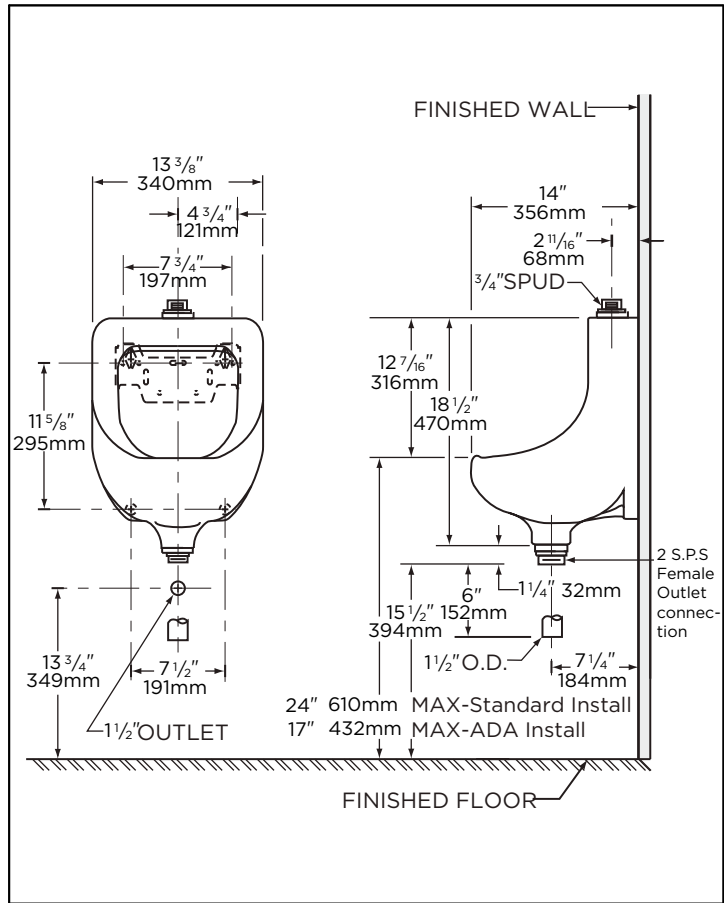

**NOTES:** All dimensions are in inches and millimeters. Use flush valve MFR'S recommended rough-in.  
Recommended static water pressure for plumbing fixtures is 20-80 psi static per ASME standards A112.19.2.  
Illustrations may not be drawn to scale.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2. THIS FIXTURE QUALIFIES ACCORDING TO ASME TEST PROCEDURES AS EITHER A LOW CONSUMPTION URINAL WITH AN AVERAGER CONSUMPTION OF 1.0gpf (3.8Lpf) OR LESS, OR AS A HIGH EFFICIENCY URINAL WITH AN AVERAGE CONSUMPTION OF 0.5gpf(1.9Lpf). URNIAL CONSUMPTION IS DETERMINED BY THE FLUSHOMETER VALVE.  
**PLUMBERS NOTE:** Provide suitable reinforcement for all wall supports.