GDF530PGM/PSM/PMM

GE® Dishwasher with Front Controls


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


ELECTRICAL RATING

Voltage AC	120
Hertz	
Total connected load amperage	7.1
Calrod® heater watts max	

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

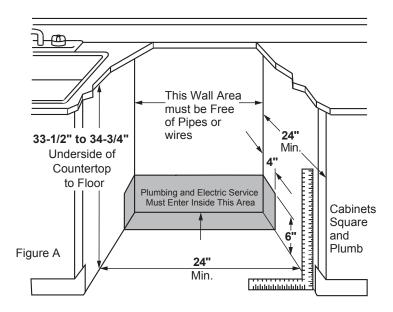

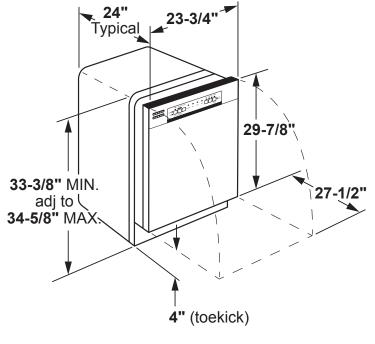









For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

GDF530PGM/PSM/PMM

GE® Dishwasher with Front Controls

FEATURES AND BENEFITS

Dry Boost – Gets hard-to-dry items up to 3 times dryer than standard dry cycles

Dedicated Silverware Jets – Get table-ready silverware thanks to powerful jets that focus on silverware baskets

Steam + Sani – Loosens tough soils before any cycle virtually eliminating the need for soaking or pre-rinsing dishes. Plus a High-temperature rinse sanitizes and reduces 99.999% of bacteria found on dishes

Piranha Hard Food Disposer – To ensure consistently clean items, this stainless steel blade rotates at $3,600~\rm{RPM}$ to pulverize food particles and helps to prevent large particles from clogging the wash arms

Nylon Racks - Durable racks are designed to resist rust and secure dishes

1 Hr Wash - Enjoy a quality clean when you're short on time

AutoSense cycle – Automatically adjusts to soil level to maximize energy savings and ensure clean dishes

Sanitize Cycle – High-temperature rinse sanitizes and reduces 99.999% of bacteria found on dishes

Adjustable Upper Rack – Fitting plates up to $10\frac{1}{2}$ " and other tall items in the upper rack is possible with an adjustment

dBA50

Model GDF530PSMSS - Stainless steel

Model GDF530PGMWW - White

Model GDF530PGMBB - Black

Model GDF530PGMCC - Bisque

Model GDF530PMMES - Slate

