

# GXMD30W

## GE® Smart Water Softener 30,000 Grain Capacity with Integrated Filtration

### Dimensions and Installation Information (in inches)





**Plumbing Codes:** All plumbing must be completed in accordance with national, state and local plumbing codes. In the state of Massachusetts: The Commonwealth of Massachusetts plumbing code 248-CMR shall be adhered to. A licensed plumber shall be used for this installation.

**Installation Information:** For complete information, see installation instructions packaged with the water softener.

**Power Requirements:** The water softener uses a direct plug-in external supply (included). Be sure to use the included power supply and plug it into a nominal 120V, 60 cycle household outlet that is in a dry location only, grounded and properly protected by an over current device such as a circuit breaker or fuse.

**Location:** Install the water softener close to the water supply inlet, and upstream of all other plumbing connections, except outside water pipes. A nearby drain is needed to carry away regeneration discharge (drain) water. Use a floor drain, laundry tub, sump, standpipe or other options (check your local codes). Do not locate the water softener where freezing temperatures occur. Do not attempt to treat water over 120°F. Freezing temperatures or hot water damage voids the warranty.

### Proper Order to Install Water Treatment Equipment:

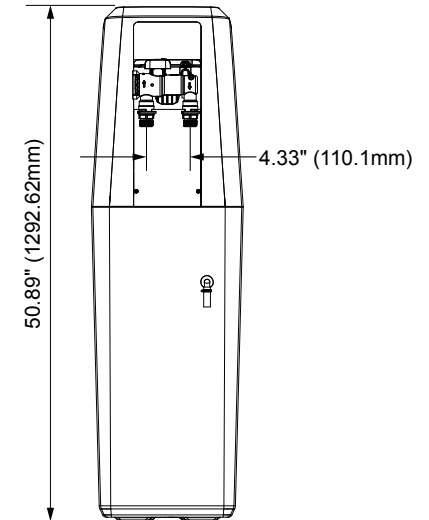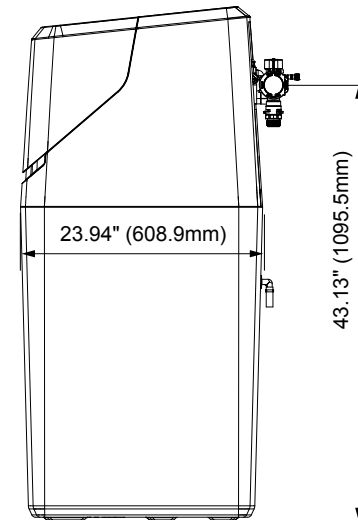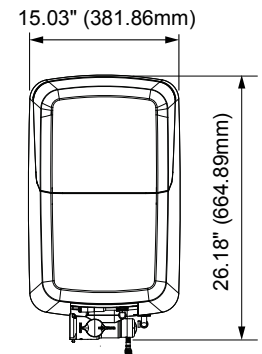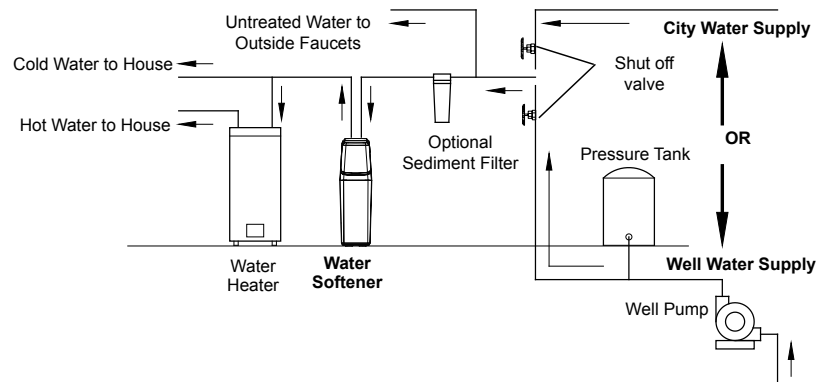

GE APPLIANCES

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/25

# GXMD30W

## GE® Smart Water Softener 30,000 Grain Capacity with Integrated Filtration

### Features and Benefits

**30,000 Grain Capacity** - This GE Smart Water Softener can remove 30,000 grains and can accommodate a household family size of up to 6 persons or more

**Water Flow Monitoring Powered by SmartHQ™** - View daily or weekly water softener usage and receive alerts on your smartphone when there is continuous water flow or a potential leak is detected

**Leak Detection with Remote Water Shutoff Valve\*** - Enjoy complete peace of mind with an optional water shutoff valve that remotely shuts off water to entire house when a leak is detected. (\*RMVALVESFT sold separately)

**Integrated Filtration** - This Smart Water Softener has integrated filtration that reduces sand, sediment, chlorine taste & odor and is self-cleaning

**Bypass Blending Valve Control** - A custom water bypass blending valve allows you to conveniently control your preferred water softness level or set as complete bypass

**WiFi-Enabled Low Salt Reminder Powered by SmartHQ™** - Receive an instant notification on your smartphone when your water softener salt level is low

**WiFi-Enabled Vacation Mode Powered by SmartHQ™** - Receive an instant notification on your smartphone when water flow is detected at any flow rate when set on vacation mode

**LED Digital Control Panel** - This Smart Valve water softener allows you to choose what is displayed on your LED Digital Control Panel. Settings include Clock Adjustment options, Salt Level, Hardness Level and Salt Saver Mode

**Salt Days to Empty Indicator** - Manage your water softener salt usage with a visual countdown of days until empty clearly displayed on the control panel

**Clear View Lid** - Clear lid allows quick & easy view of LED display and salt level

**Easy-Fill Salt Tank** - Easy-to-fill wide tank for salt replenishment

**Robust Plumbing Connections** - This Smart Valve water softener is designed with 1" plumbing connections with dual O-ring seals for extra protection. Included 1" water softener connectors can conveniently accommodate both 3/4" and 1-1/4" plumbing

**Salt Capacity** - 230 lbs.



**GE APPLIANCES**

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/25