



39796 FASCINO

GESSI®

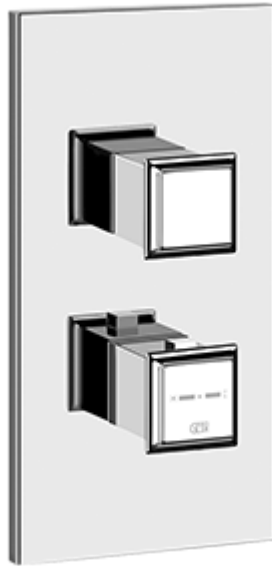

Technical features

- Single backplate
- High capacity
- 3/4" connections
- Vertical/Horizontal application
- Anti-scalding
- Requires in-wall rough valve 39691

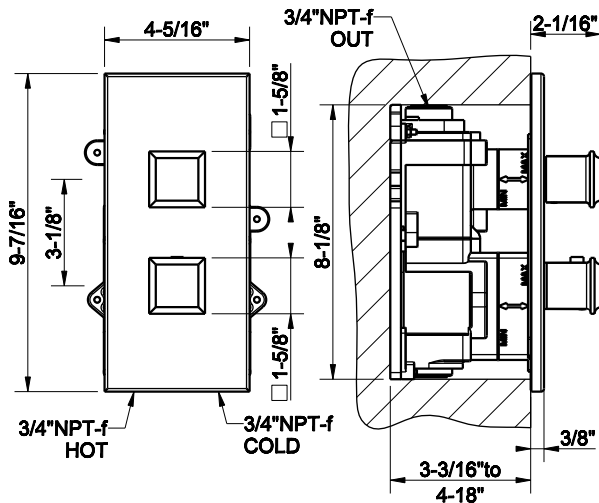


Certifications

The official approvals of this item in standard Gessi version are on the built-in part 39691

(For additional approvals contact Gessi S.p.A.):

- Certified to ASME A112.18.1/CSA B125.1
- MASSACHUSETTS

Available Finishes

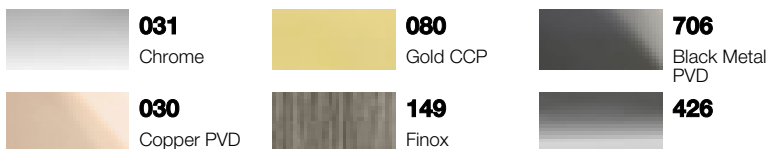

Technical Prescription

- Working maximum pressure value 5 bar - in case of higher pressure, to use a pressure reducer
- Working pressure for an optimal installation: 3 bar
- Working water temperature not be higher than 70°C.
- In order to guarantee a long duration of the product and its total functionality install filter
- Test watertight and cleaning of the pipes before installing the tap.

Indications for the cleaning

Clean only with a microfiber cloth and soapy water and dry properly the item. Detergents, solvents, chemical agents, abrasive sponges, wire wool, alcohol, etc. should not be used as these could irreparably damage product surfaces compromising its aesthetics and brightness.

Accessories and Fittings

For additional matching bathroom accessories and fittings available, see official Gessi price list.