

Assembly Instructions: 0270-LP BLK


IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For customer service, please contact the authorized retailer where the fixture was purchased.

Wiring Diagram


Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

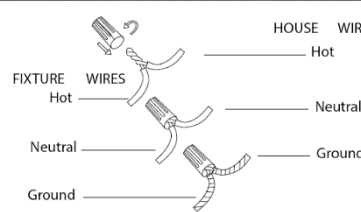

Remove all of the contents from the carton. See the important notes above.

Remove the old fixture from the ceiling, including the old mounting strap.

Note: Wires will go through one of the two sides of rods (H)(I)(K)

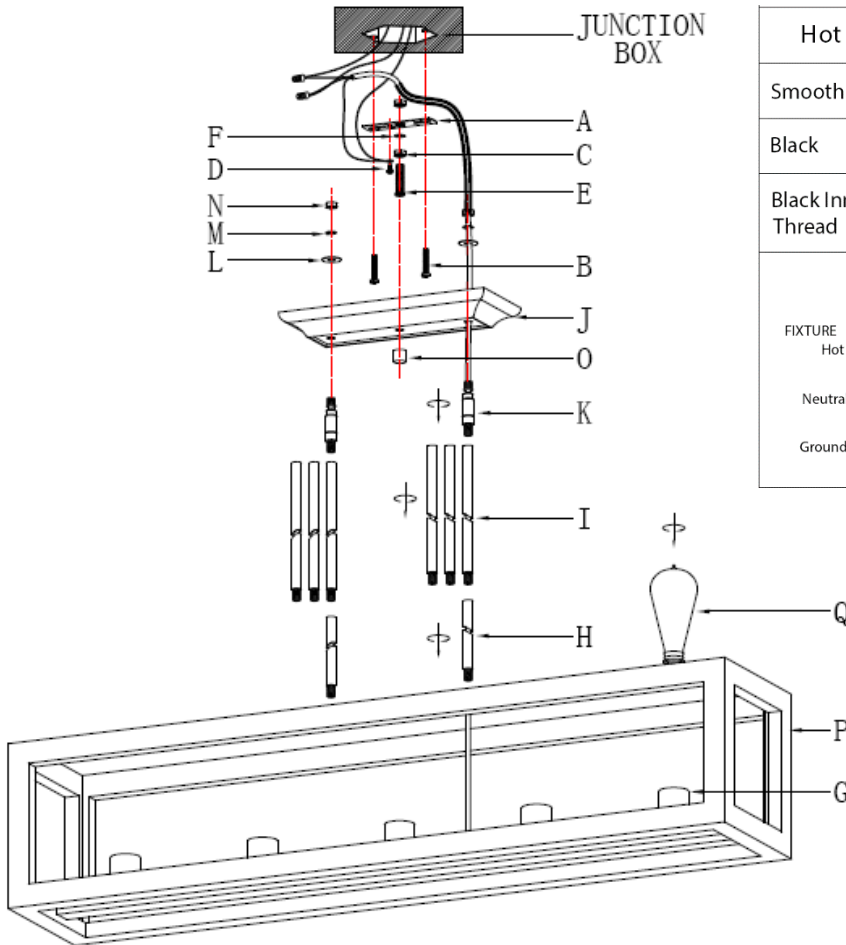

Step 1: Remove the mounting assembly from the part bag.

Step 2: Install the (A) mounting bracket on the junction box with (B) screws.

Step 3: Install the (F) washer (C) nut and (E) tooth segment on the (A) mounting bracket in turn.

Step 4: Connect the ground wire to the (D) green screw on the (A) mounting bracket

Step 5: First install the (H) short round tubes on the (P) assembled frame, then install the (I) long round tubes one by one.

Step 6: Install the (K) movable heads on the (I) long round tubes, and then place it through the (J) canopy top plate.

Step 7: Install the (L) disc, (M) spring pad, and (N) nut on the (K) movable head to lock it on the (J) canopy top plate.

Step 8: **CONNECTING THE WIRES** Refer to the wiring diagram and attach the fixture's wires to the power supply wires from the junction box. Connect Hot to Hot, and Neutral to Neutral, and Ground to Ground. Twist the ends of the wire pairs together, and then twist on a wire connector. Make sure all twists are in the same direction. If there is no house ground wire coming from the junction box, leave ground wire attached to the (D) green ground screw on the (A) mounting bracket. Tuck the wires into the junction box.

Step 10: **FINISHING THE INSTALLATION** Fix the assembled (J) canopy top plate with (O) end nipple under the (E) tooth segment, and finally install the (Q) light sources at the (G) sockets.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.